



HISAKAGE®
PRODUCT CATALOG 2024.9

HISAKAGE®

Ice Maker & Refrigerator

HISAKAGE·CHINA

Zhejiang Hisakage Refrigeration Equipment Co., Ltd. (Factory)

<http://www.hisakage.com>



※Due to technical upgrades, not all details of some products are disclosed. The data on the day of purchase shall prevail.



Menu

Ice Maker

| | |
|---|-------|
| AC—Cube/Half Cube/Large Cube Ice | 04-06 |
| SC—Square/Small Square/Large Square Ice | 07-08 |
| EC—Cylindrical Ice | 09-10 |
| BT—Bullet Ice | 10 |
| JM—Crescent Ice | 11-12 |
| AS—Flake/Nugget Ice | 13-14 |
| AP—Scale Ice | 15 |
| AM—Automatic Ice Dispenser | 16 |



We strive to produce higher quality ice.

Refrigerator

| | |
|--|-------|
| E—201 Direct Cooling Refrigerator | 18-19 |
| C—201 Air Cooling Refrigerator | 20-21 |
| CG—201 Air Cooling Glass Door Refrigerator | 22-23 |
| CB—201 Air Cooling Bakery Refrigerator | 24 |
| CS—201 Air Cooling Salad Refrigerator | 25 |
| CP—201 Air Cooling Pizza Refrigerator | 25 |



We are committed to innovation, creating smarter and more energy-efficient kitchen refrigerators.

| | |
|--|-------|
| CW—201 Air Cooling Wall-mounted, Sliding Door | 26 |
| CL—201 Air Cooling Chef base | 26 |
| V—304 Air Cooling Refrigerator | 27-28 |
| VG—304 Air Cooling Glass Door Refrigerator | 29-30 |
| BC—304 Air Cooling Bar Glass Door Refrigerator | 31 |

| | |
|--|----|
| BH—304 Air Cooling Open Kitchen Refrigerator | 31 |
| CQ—304 Air Cooling Blast Freezer | 32 |
| CD—Deep Freezer | 32 |
| BP—304 Air Cooling Heated Banquet Carts, Mobile Refrigerator | 33 |
| BG—304 Air Cooling Trolley Freezer | 34 |

Showcase

| | |
|--------------------------|----|
| DS—Sushi Showcase | 36 |
| DCL—Rectangular Showcase | 37 |
| DCA—Arc Showcase | 38 |
| DH—High Quality Showcase | 39 |
| DI—Ice Cream Showcase | 40 |
| DOT—Island Showcase | 41 |
| DOV—Air Curtain Showcase | 42 |



HISAKAGE, designed and manufactured to bring your ideas to life.

HISAKAGE

Committed to producing better quality products.

HISAKAGE[®] Ice Maker



New Structure Design



Main Parts Easy to Remove



Foam Isolation in the Ice-Making Area



Patented Anti-Backflow Elbow



Intelligent Control System



High-Efficiency Evaporator Plate



Top Ventilation Design




Food-Grade Ice Storage Bin


AC—Cube/Half Cube/Large Cube Ice




Flowing **vertical** ice making
Evaporation temperature: -18°C
Ice **center** temperature: -13°C




M: Cube
Weight: 11g
Water content: 2%
Dimension: 23x23x23




S: Half cube
Weight: 6g
Water content: 2%
Dimension: 10x28x23




L: Large cube
Weight: 16g
Water content: 2%
Dimension: 28x28x23

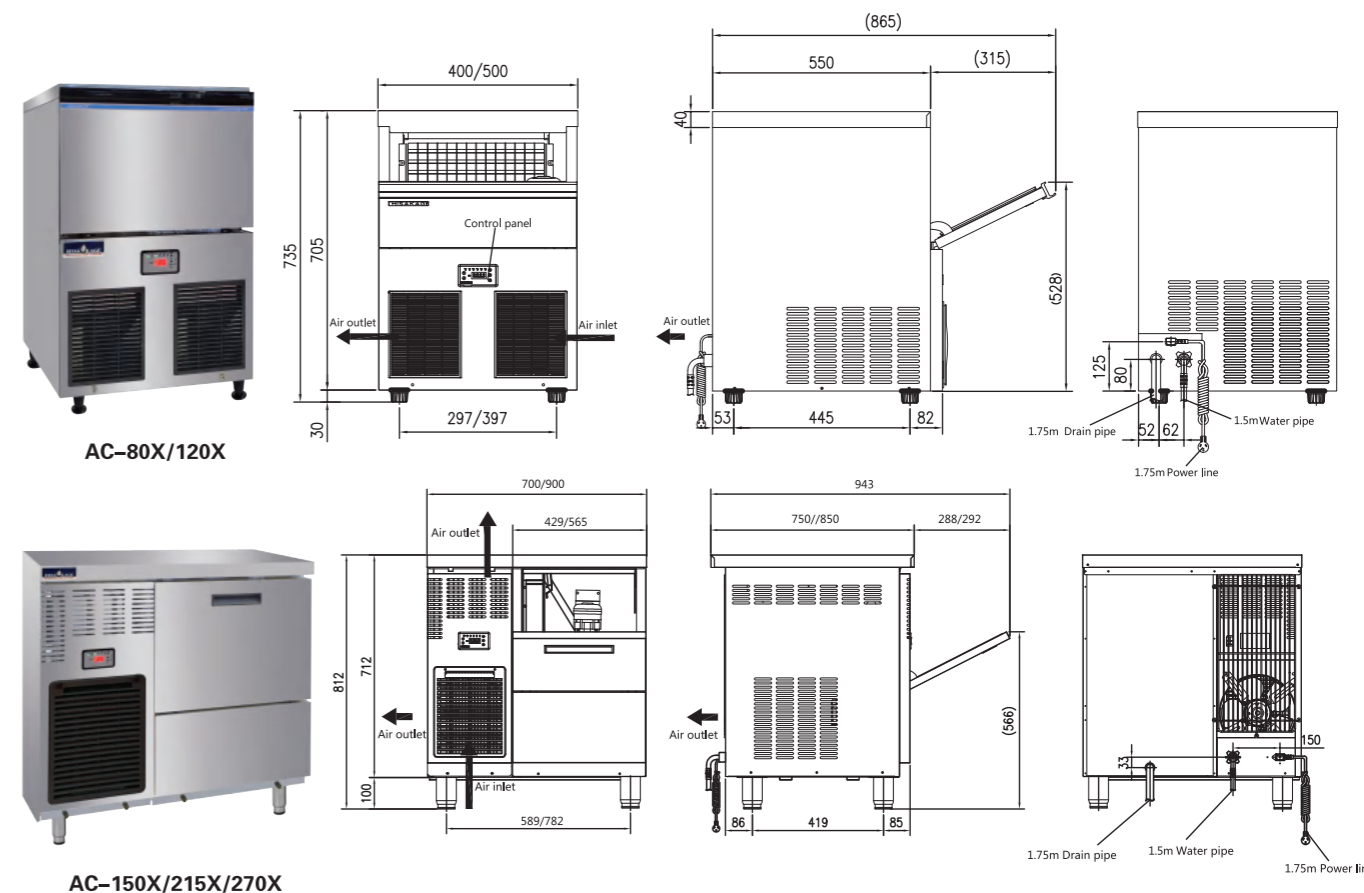


That is why choose HISAKAGE ice maker.

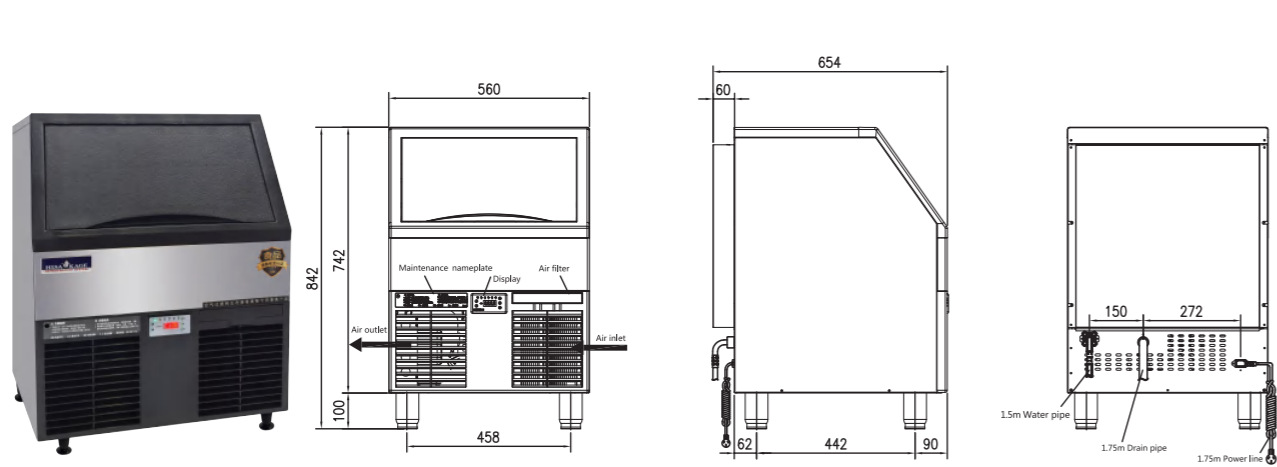

AC-100/150

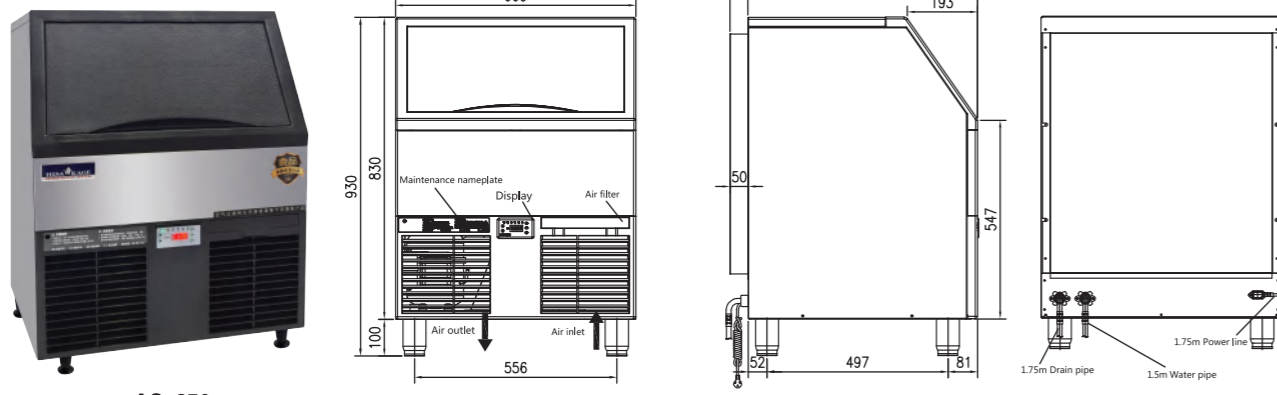


AC-250

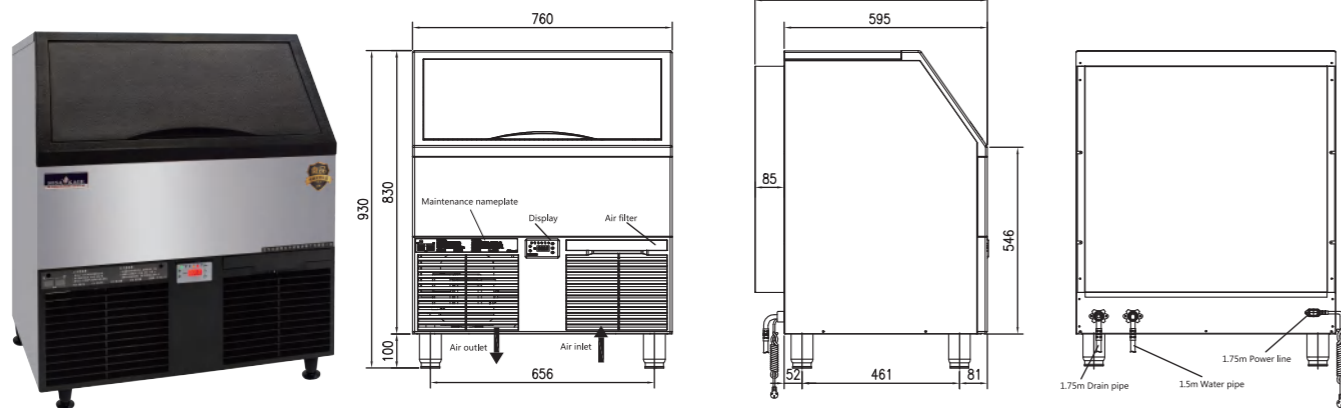


AC-300

| Model | Production (lbs/kg) | Storage Capacity (lbs/kg) | Power | Ice Type | Cooling | Refrigerant | Dimensions W*D*H(mm) |
|---------|---------------------|---------------------------|-------|----------|-----------|-------------|-------------------------|
| AC-80X | 77 lbs/35kg | 16 lbs/8kg | 285W | Cube | Air | R290 | 400x580x(705+30) |
| AC-120X | 121 lbs/55kg | 33 lbs/15kg | 320W | Cube | Air | R290 | 500x580x(705+30) |
| AC-150X | 154 lbs/70Kg | 66 lbs/30Kg | 360W | Cube/1/2 | Air | R290 | 700 x 650 x (705+100) |
| AC-215X | 209 lbs/95Kg | 66 lbs/30Kg | 420W | Cube/1/2 | Air | R290 | 700 x 650 x (705+100) |
| AC-270X | 275 lbs/125Kg | 110 lbs/50Kg | 680W | Cube/1/2 | Air | R290 | 900 x 750 x (705+100) |
| AC-100 | 110 lbs/50Kg | 39 lbs/18Kg | 320W | Cube | Air | R290 | 560 x 580 x (745+65) |
| AC-150 | 154 lbs/70Kg | 39 lbs/18Kg | 360W | Cube/1/2 | Air | R290 | 560 x 580 x (745+65) |
| AC-250 | 231 lbs/105Kg | 66 lbs/30Kg | 420W | Cube/1/2 | Air | R290 | 660 x 670 x (830+100) |
| AC-300 | 297 lbs/135Kg | 88 lbs/40Kg | 680W | Cube/1/2 | Air | R290 | 760 x 670 x (830+100) |
| AC-500 | 485 lbs/220Kg | 352 lbs/160Kg | 800W | Cube/1/2 | Air/Water | R410A | 560 x 885 x (1655+150) |
| AC-700 | 705 lbs/320Kg | 551 lbs/250Kg | 1000W | Cube/1/2 | Air/Water | R410A | 760 x 885 x (1655+150) |
| AC-1050 | 992 lbs/450Kg | 551 lbs/250Kg | 1600W | Cube/1/2 | Air/Water | R410A | 760 x 885 x (1755+150) |
| AC-1500 | 1433 lbs/650Kg | 881 lbs/400Kg | 1900W | Cube/1/2 | Air/Water | R410A | 1220 x 885 x (1755+150) |
| AC-2000 | 1873 lbs/850Kg | 881 lbs/400Kg | 3200W | Cube/1/2 | Air/Water | R410A | 1220 x 885 x (1755+150) |


Note: AC Series Ice Production Testing Conditions: 21°C and 15°C. Ice type option for M (Cube Ice), S (Half Cube Ice), L (Large Cube Ice).

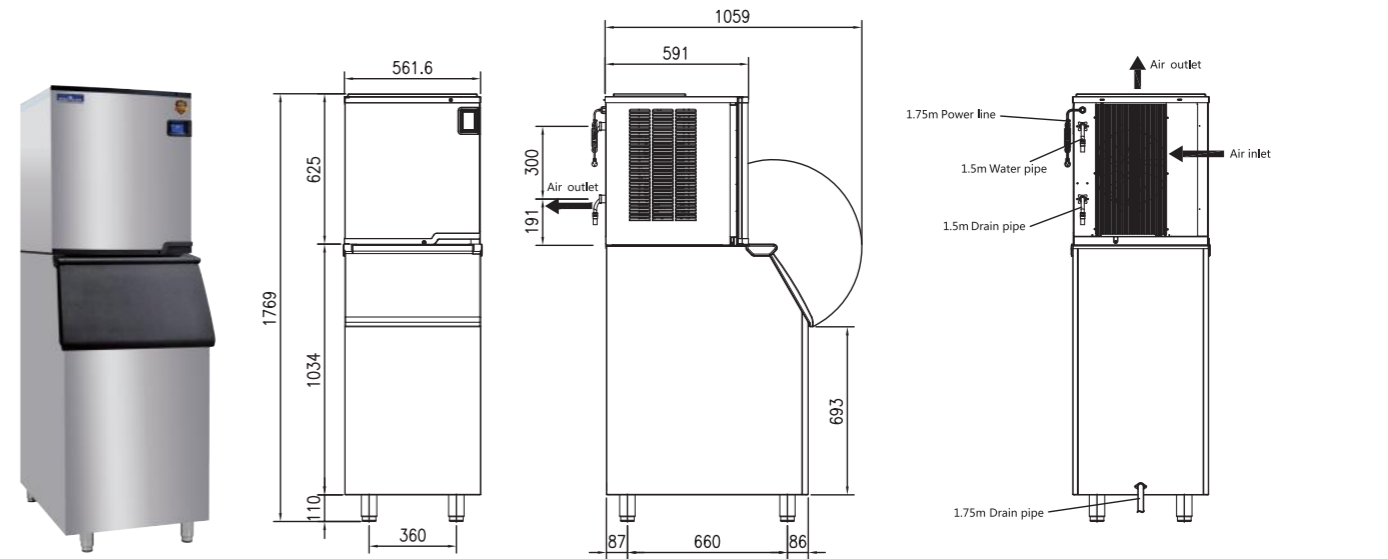

AC-500

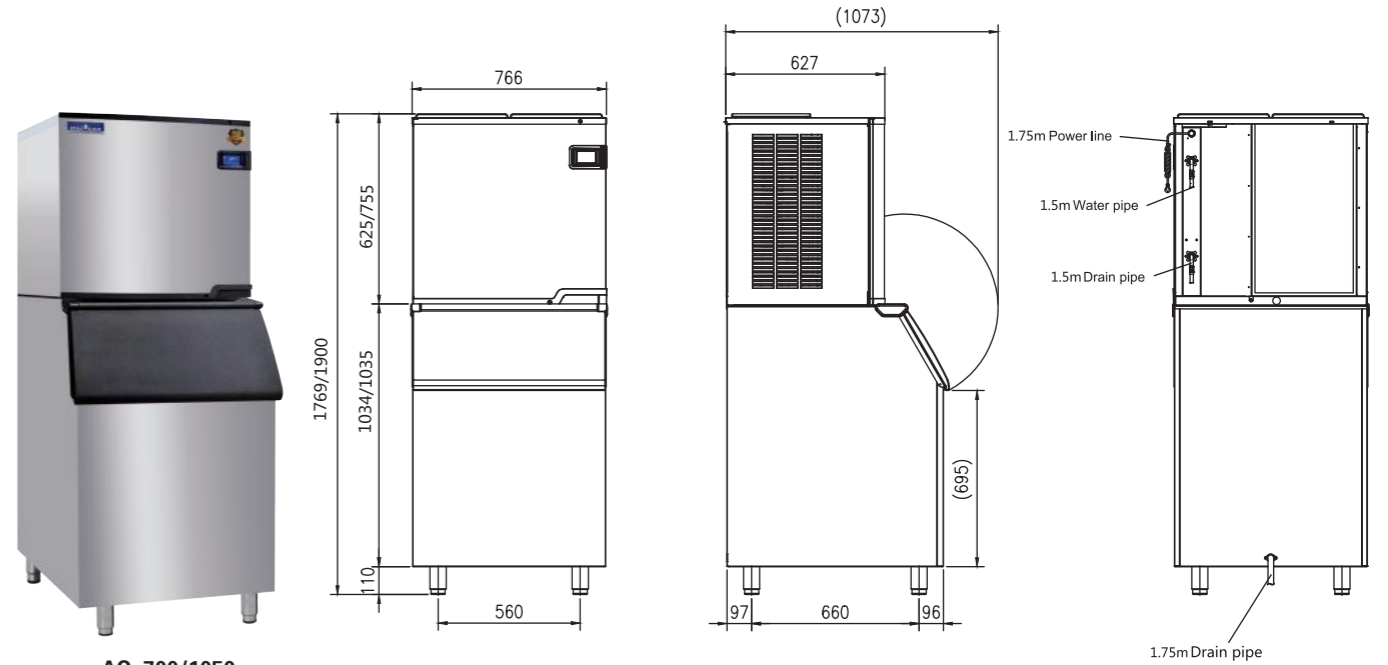


AC-700/1050

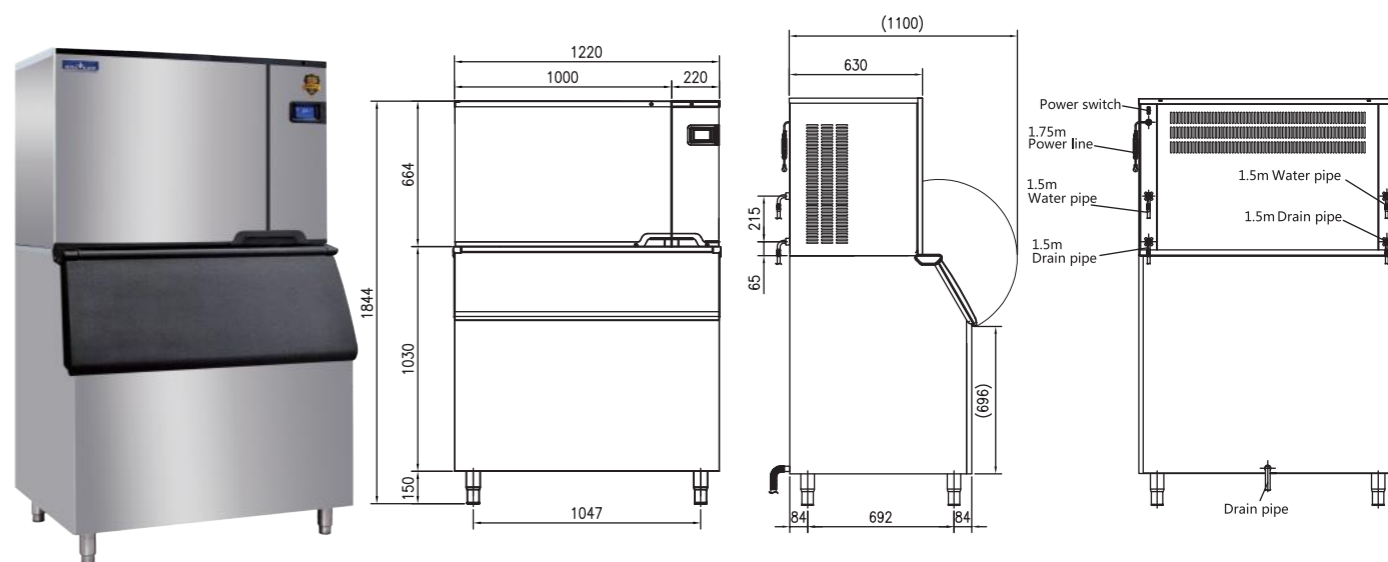


AC-1500/2000

*The AC-2000 base standard 380V, 50Hz 3P.


SC—Square/Small Square/Large Square Ice

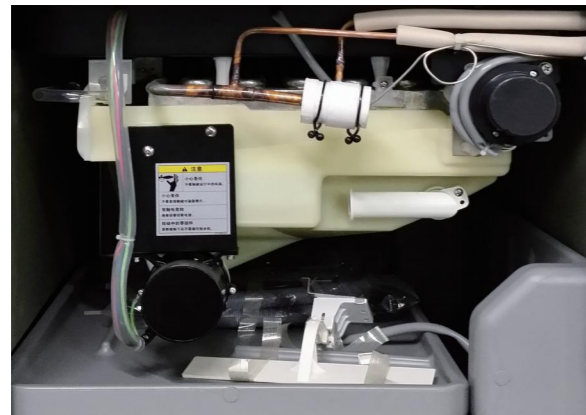


Spray enclosed ice making
Evaporation temperature: -25°C
Ice center temperature: -17°C




SS: Small square
Weight: 11g
Water content: 2%
Dimension: 23x23x23



MS: Square
Weight: 23g
Water content: 2%
Dimension: 28x28x32



LS: Large square
Weight: 105g
Water content: 2%
Dimension: 45x45x50

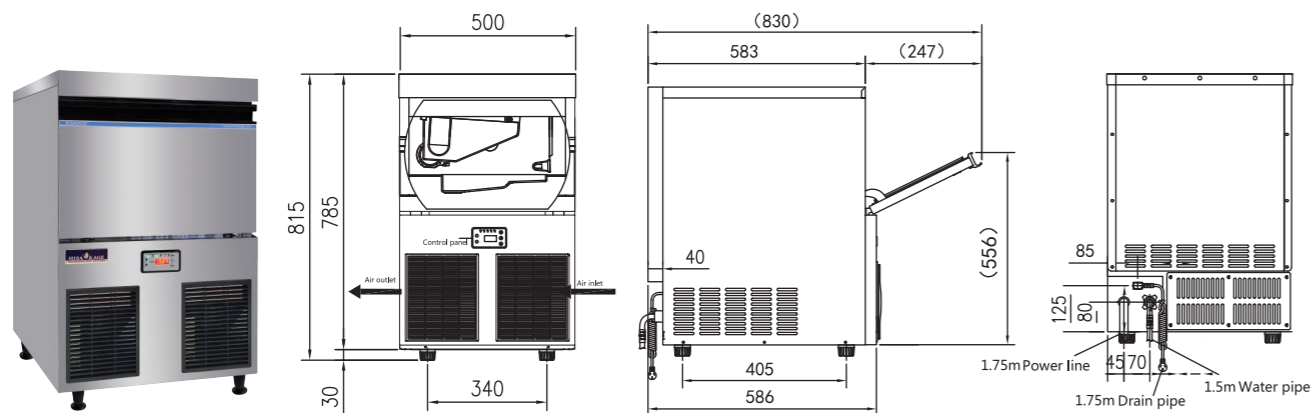


SC-100/120

| Model | Production (lbs/kg) | Storage Capacity (lbs/kg) | Power | Ice Type | Cooling | Refrigerant | Dimensions W*D*H(mm) |
|---------|---------------------|---------------------------|-------|------------|-----------|-------------|-------------------------|
| SC-100 | 110 lbs/50Kg | 33 lbs/15Kg | 320W | Square | Air | R290 | 500 × 580 × (785+30) |
| SC-120 | 121 lbs/55Kg | 33 lbs/15Kg | 320W | 3/4 Square | Air | R290 | 500 × 580 × (785+30) |
| SC-200 | 209 lbs/95Kg | 66 lbs/30Kg | 460W | Square | Air | R290 | 660 × 670 × (830+30) |
| SC-200L | 209 lbs/95Kg | 66 lbs/30Kg | 460W | Square | Air | R290 | 660 × 670 × (830+30) |
| SC-500 | 440 lbs/200Kg | 352 lbs/160Kg | 850W | Square | Air/Water | R410A | 560 × 885 × (1852+150) |
| SC-1000 | 880 lbs/400Kg | 881 lbs/400Kg | 1700W | Square | Air/Water | R410A | 1220 × 885 × (1852+150) |


Note: SC series testing condition: 15°C and 10°C .




SC-200/200L

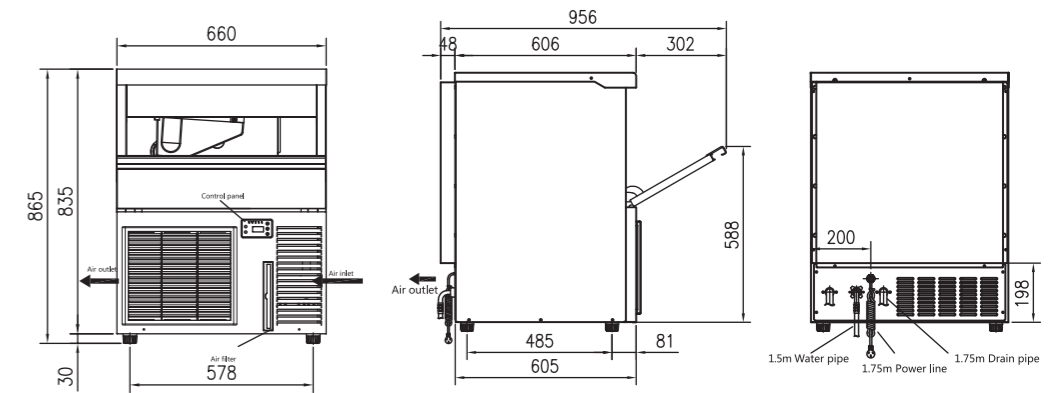


SC-500

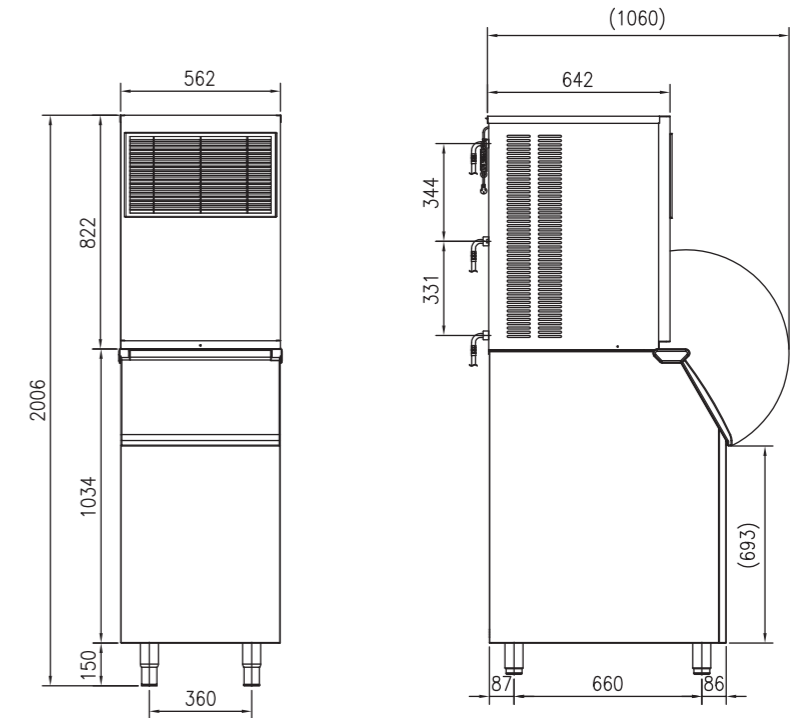

SC-1000

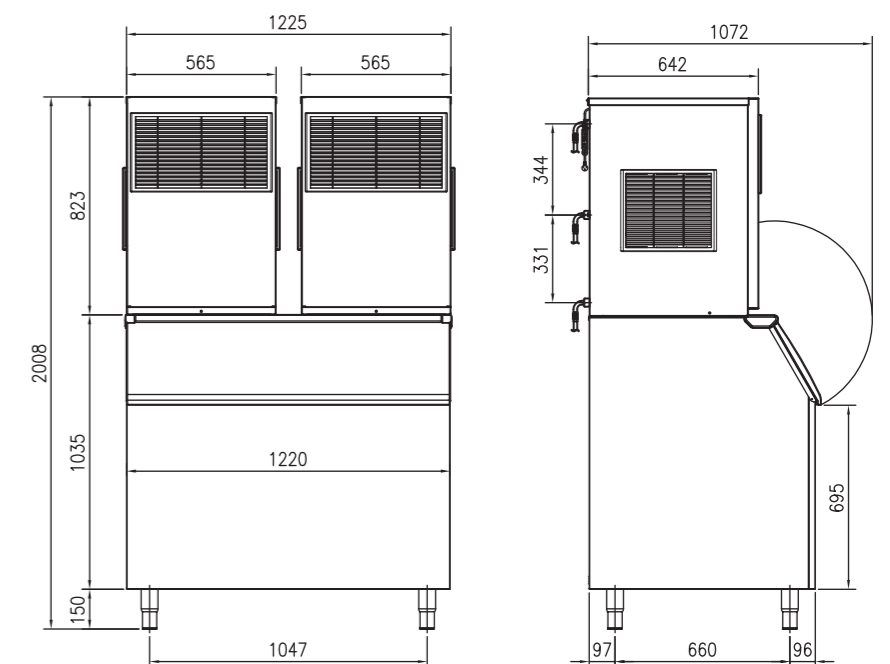


EC—Cylindrical Ice

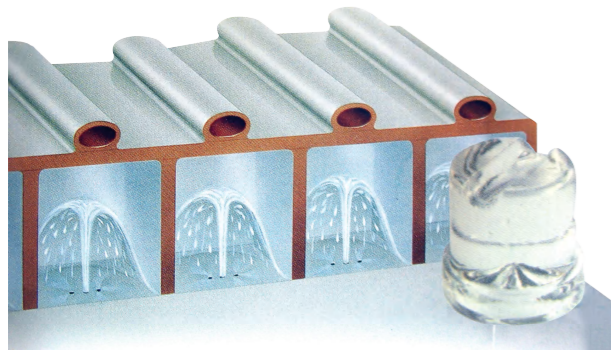

Spray **enclosed** ice making
Evaporation temperature: -25°C
Ice **center** temperature: -15°C





EC: Cylindrical
Weight: 20g
Water content: 2%
Dimension: $\phi 25 \times 30\text{mm}$

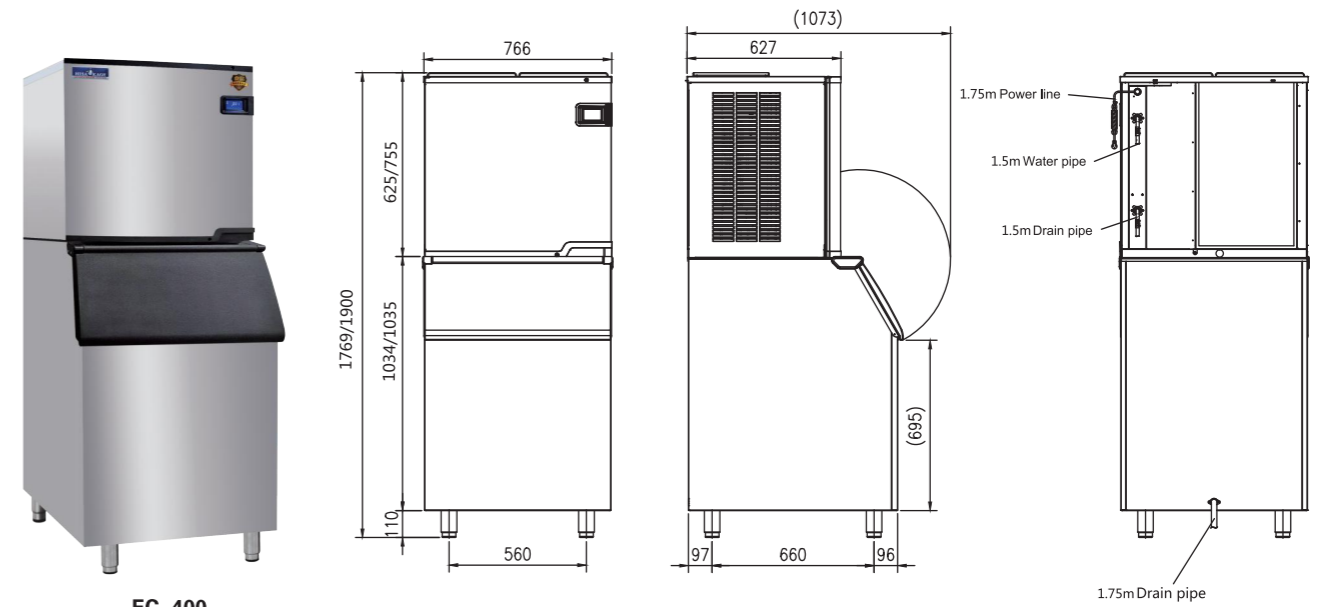

| Model | Production (lbs/kg) | Storage Capacity (lbs/kg) | Power | Ice Type | Cooling | Refrigerant | Dimensions W*D*H(mm) |
|--------|-----------------------|-----------------------------|-------|-------------|-----------|-------------|------------------------|
| EC-65 | 66 lbs/30Kg | 17 lbs/8Kg | 320W | Cylindrical | Air | R290 | 400 × 620 × (700+30) |
| EC-105 | 110 lbs/50Kg | 33 lbs/15Kg | 360W | Cylindrical | Air | R290 | 500 × 620 × (700+30) |
| EC-200 | 198 lbs/90Kg | 66 lbs/30Kg | 490W | Cylindrical | Air | R290 | 700 × 700 × (800+100) |
| EC-400 | 396 lbs/180Kg | 551 lbs/250Kg | 850W | Cylindrical | Air/Water | R410A | 760 × 885 × (1775+100) |

Note: EC series testing condition: 15°C and 10°C .

BT—Bullet Ice

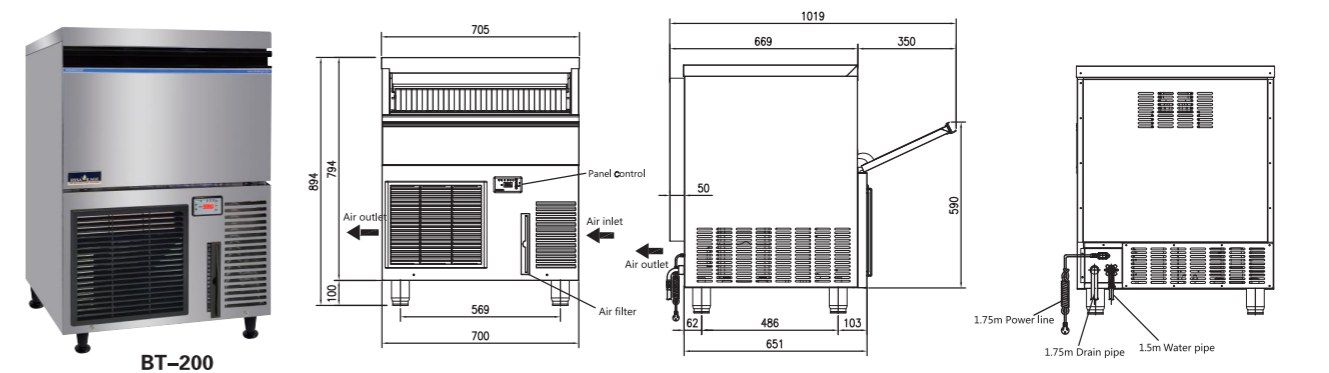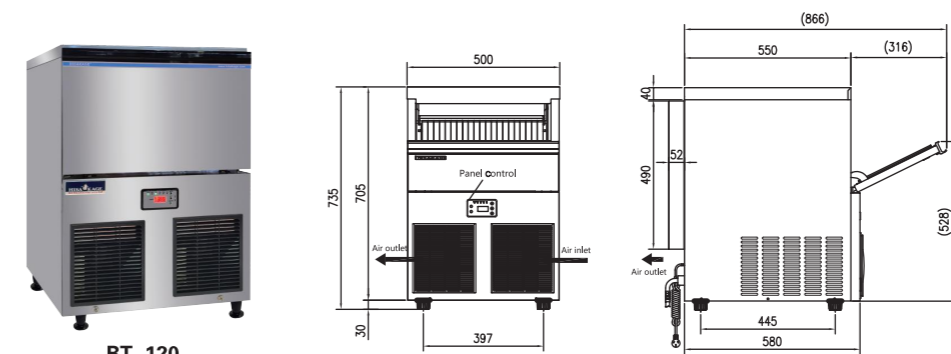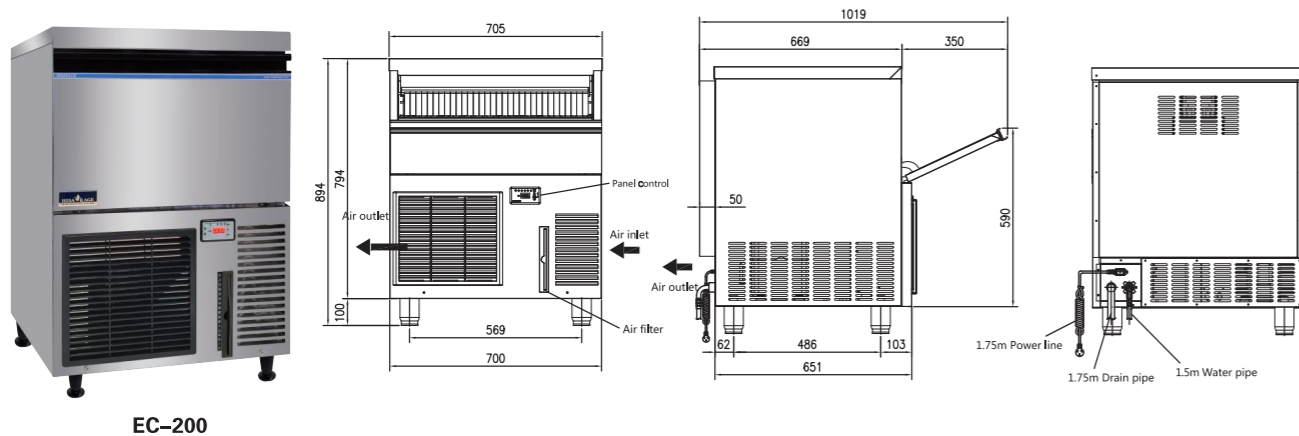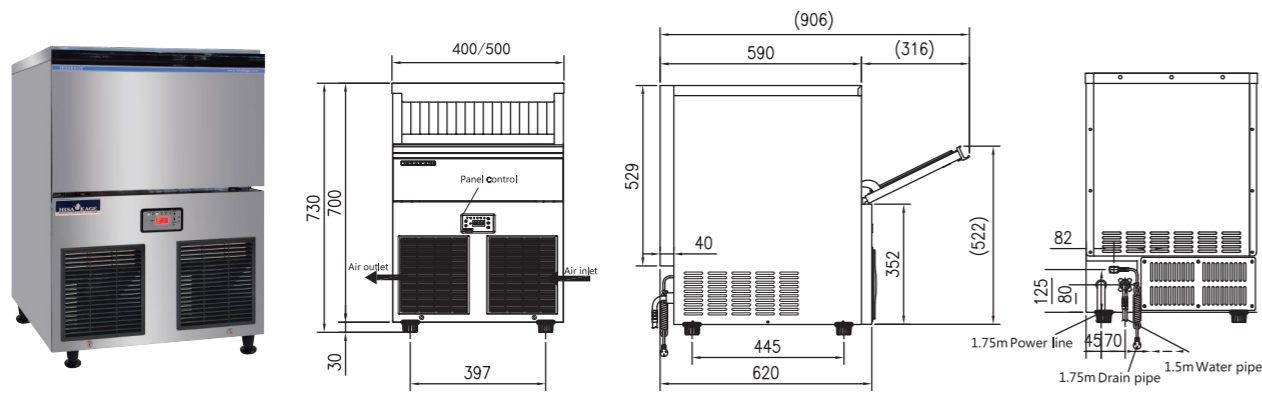


BT: Bullet ice
Weight: 17g
Water content: 2%
Dimension: $\phi 35 \times 40$

| Model | Production (lbs/kg) | Storage Capacity (lbs/kg) | Power | Ice Type | Cooling | Refrigerant | Dimensions W*D*H(mm) |
|--------|-----------------------|-----------------------------|-------|----------|---------|-------------|-----------------------|
| BT-120 | 110 lbs/50Kg | 33 lbs/15Kg | 360W | Bullet | Air | R290 | 500 × 620 × (700+30) |
| BT-200 | 198 lbs/90Kg | 66 lbs/30Kg | 490W | Bullet | Air | R290 | 700 × 700 × (800+100) |

Note: TB series testing condition: 15°C and 10°C .

JM—Crescent Ice

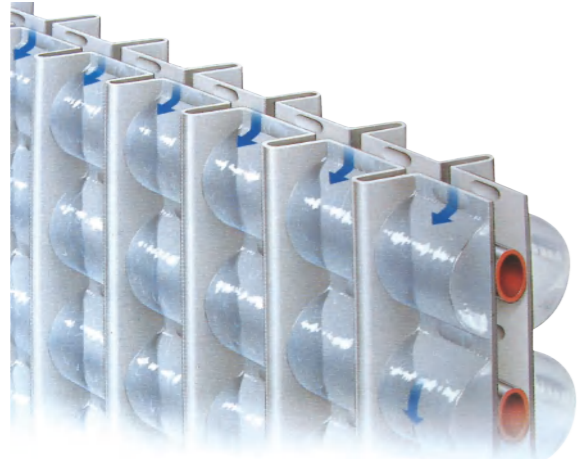


Flowing **double-sided** ice making
 Evaporation temperature: -20°C
 Ice **center temperature**: -13°C

JM: Crescent
 Weight: 10g
 Water content: 2%
 Dimension: 30x13x38mm



JM-120/250


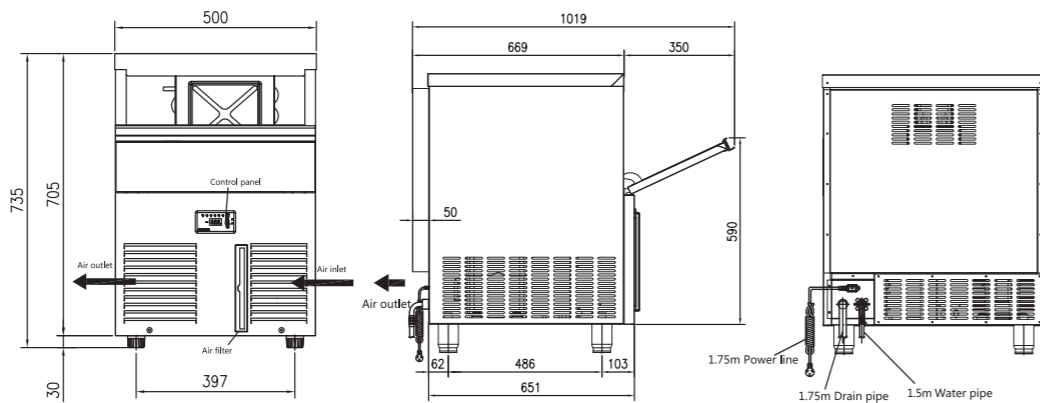


| Model | Production (lbs/kg) | Storage Capacity (lbs/kg) | Power | Ice Type | Cooling | Refrigerant | Dimensions W*D*H(mm) |
|---------|-----------------------|-----------------------------|-------|----------|-----------|-------------|-------------------------|
| JM-120 | 110 lbs/50Kg | 33 lbs/15Kg | 320W | Crescent | Air | R290 | 500 × 580 × (705+30) |
| JM-250 | 253 lbs/115Kg | 66 lbs/30Kg | 480W | Crescent | Air | R290 | 700 × 700 × (800+100) |
| JM-500 | 551 lbs/250Kg | 352 lbs/160Kg | 830W | Crescent | Air/Water | R410A | 560 × 885 × (1775+150) |
| JM-850 | 837 lbs/380Kg | 551 lbs/250Kg | 1250W | Crescent | Air/Water | R410A | 760 × 885 × (1775+150) |
| JM-1000 | 947 lbs/430Kg | 551 lbs/250Kg | 1650W | Crescent | Air/Water | R410A | 760 × 885 × (1775+150) |
| JM-1700 | 1675 lbs/760Kg | 881 lbs/400Kg | 2500W | Crescent | Air/Water | R410A | 1220 × 885 × (1775+150) |



Note: JM series testing condition: 15°C and 10°C .





JM-500

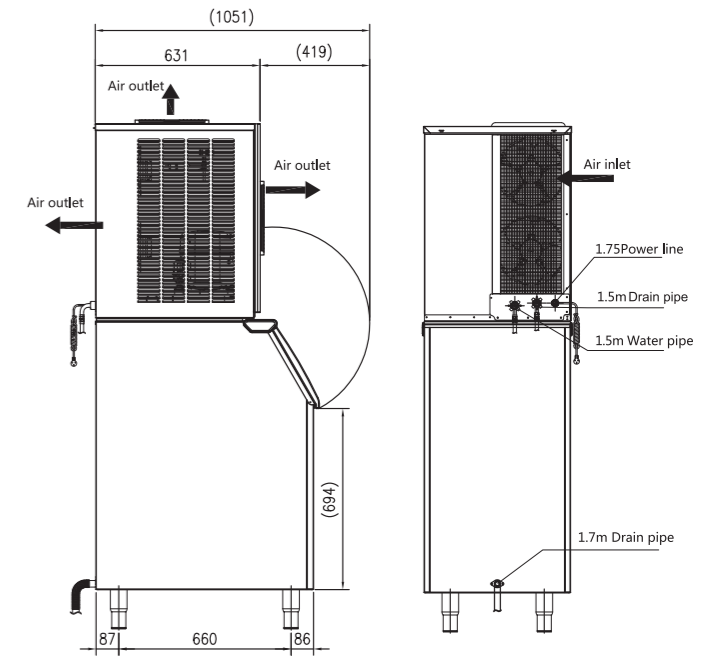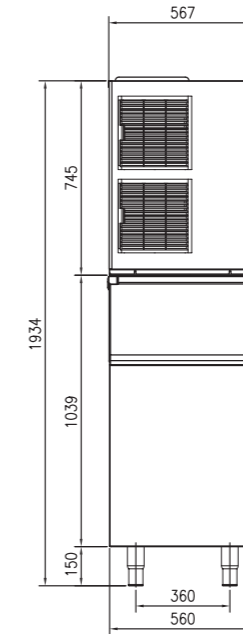


JM-850/1000

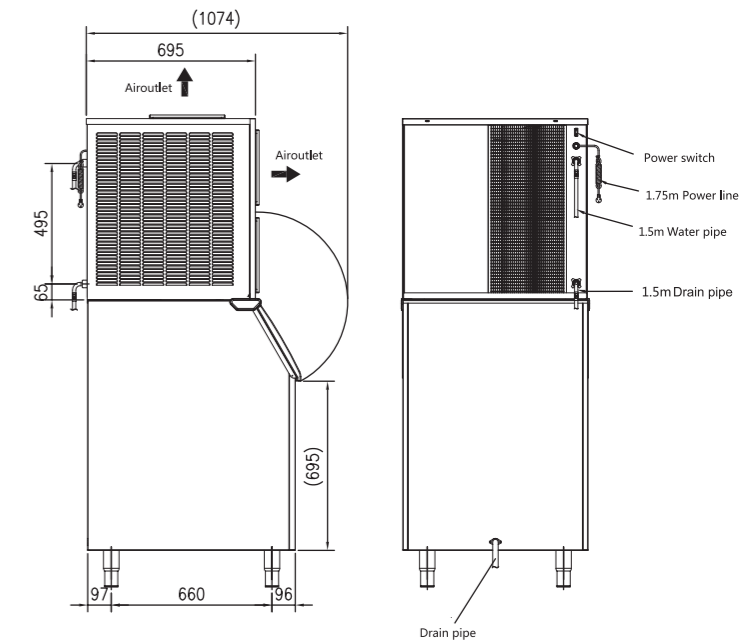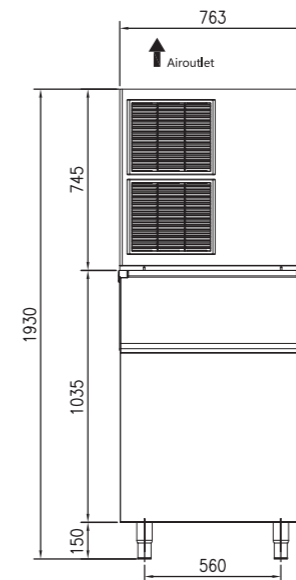

JM-1700

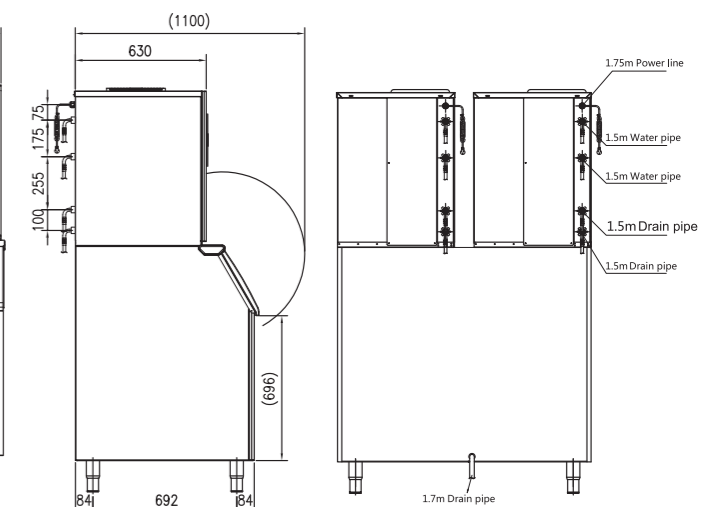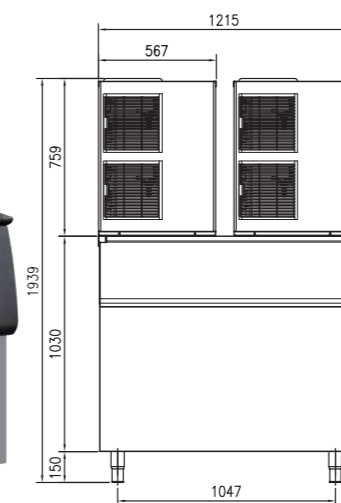

AS—Flake/Nugget Ice

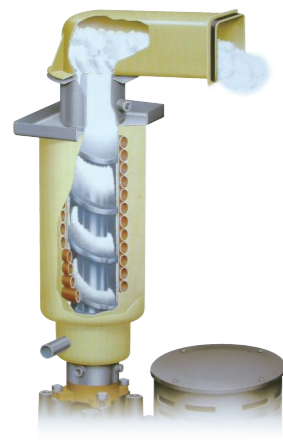

F: Flake
Weight: 1g
Water content: 10%
Dimension: 5x8mm




N: Nugget
Weight: 3g
Water content: 5%
Dimension: 10x15mm


Rotary **extrusion** ice making
Evaporation temperature: -15°C
Ice **center temperature**: -7°C



AS-200

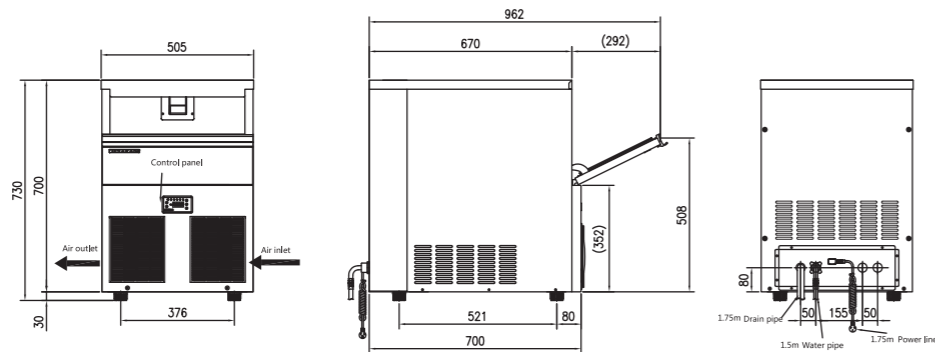

AS-300

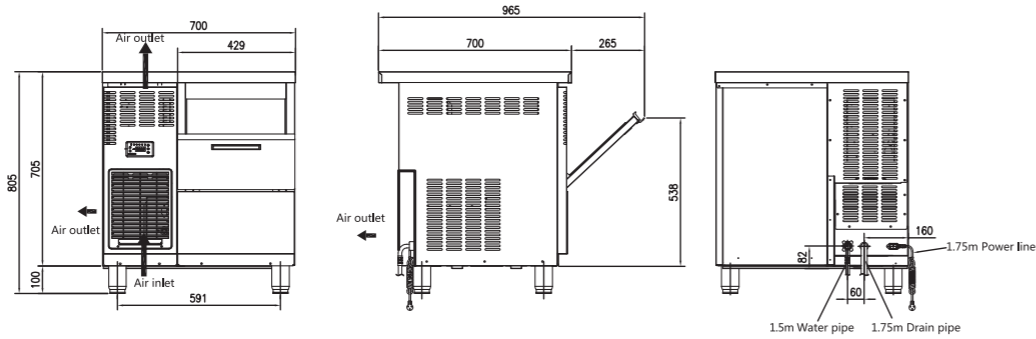


| Model | Production (lbs/kg) | Storage Capacity (lbs/kg) | Power | Ice Type | Cooling | Refrigerant | Dimensions W*D*H(mm) |
|---------|-----------------------|-----------------------------|-------|--------------|-----------|-------------|-------------------------|
| AS-200 | 198 lbs/90Kg | 33 lbs/15Kg | 460W | Flake | Air | R290 | 500 × 670 × (700+30) |
| AS-300 | 297 lbs/135Kg | 66 lbs/30Kg | 620W | Flake | Air | R290 | 700 × 700 × (705+100) |
| AS-450 | 440 lbs/200Kg | 352 lbs/160Kg | 880W | Flake/Nugget | Air/Water | R410A | 560 × 885 × (1655+150) |
| AS-650 | 705 lbs/320Kg | 551 lbs/250Kg | 1000W | Flake/Nugget | Air/Water | R410A | 760 × 885 × (1655+150) |
| AS-850 | 881 lbs/400Kg | 551 lbs/250Kg | 1200W | Flake | Air/Water | R410A | 760 × 885 × (1655+150) |
| AS-1050 | 1102 lbs/500Kg | 551 lbs/250Kg | 1300W | Flake/Nugget | Air/Water | R410A | 760 × 885 × (1775+150) |
| AS-1300 | 1322 lbs/600Kg | 551 lbs/250Kg | 1600W | Flake | Air/Water | R410A | 760 × 885 × (1775+150) |
| AS-2100 | 2204 lbs/1000Kg | 881 lbs/400Kg | 2600W | Flake | Air/Water | R410A | 1220 × 885 × (1755+150) |


Note: AS series testing condition: 15°C and 10°C .




AS-450

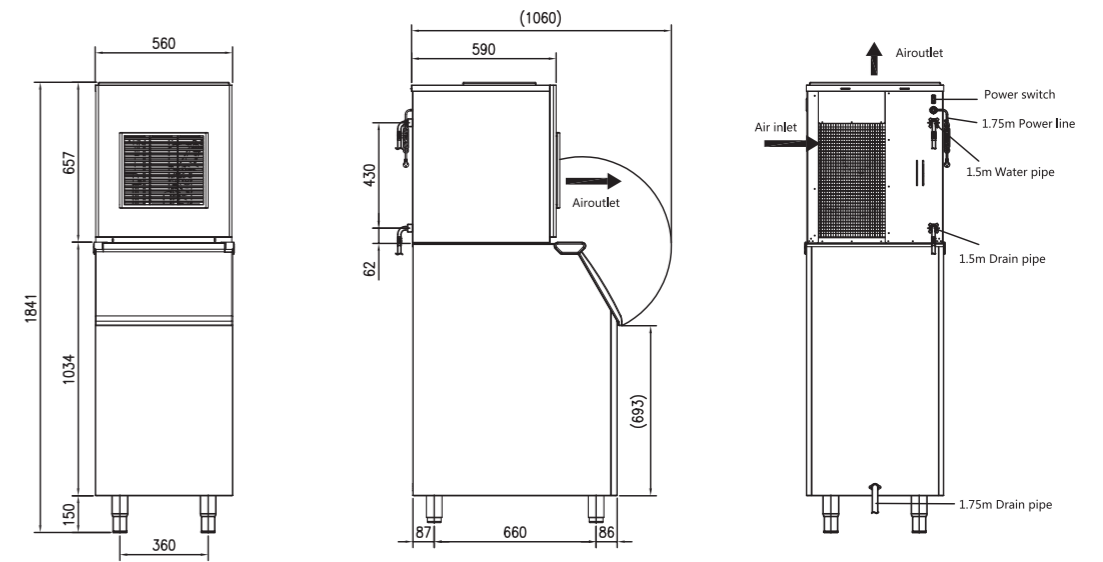

AS-650/850/1050/1300

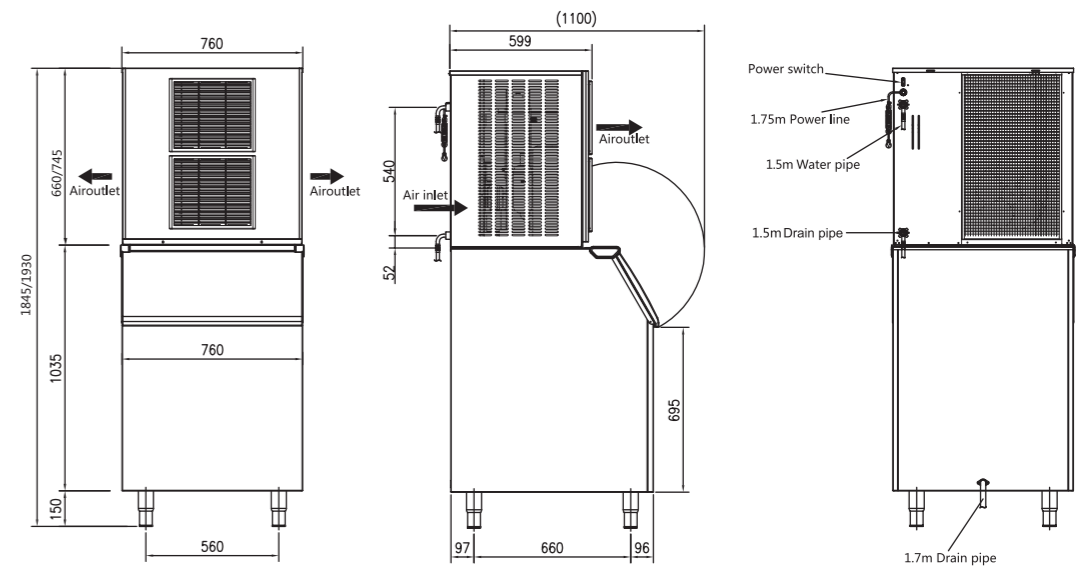

AS-2100

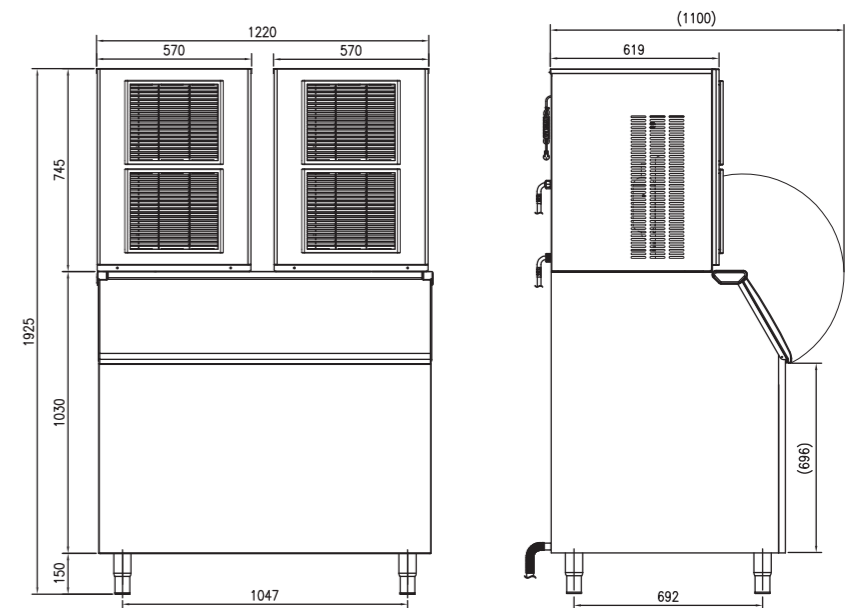

AP—Scale Ice



AM—Automatic Ice Dispenser



Vertical **cylinder** ice making
Evaporation temperature: -28°C
Scale **ice center temperature**: -15°C

AP: Scale
Weight: 3g
Water content: 2%
Dimension: 15x10x2mm

Adaptable to limited spaces, capable of continuously producing 10kg of ice.

Nugget Ice, Cube Ice, Half Cube Ice

Avoid contact between the cup rim and barrier, ensuring greater hygienic and clean.

Tailored to customer requirements with stainless steel or painted cabinet, addressing issues of no water inlet/drainage.


The drain tray at the front of the machine is easy to remove and clean.




Hygienic and Convenient Automatic Ice Maker — *Bring you unique user Experience.*




AP-0.3

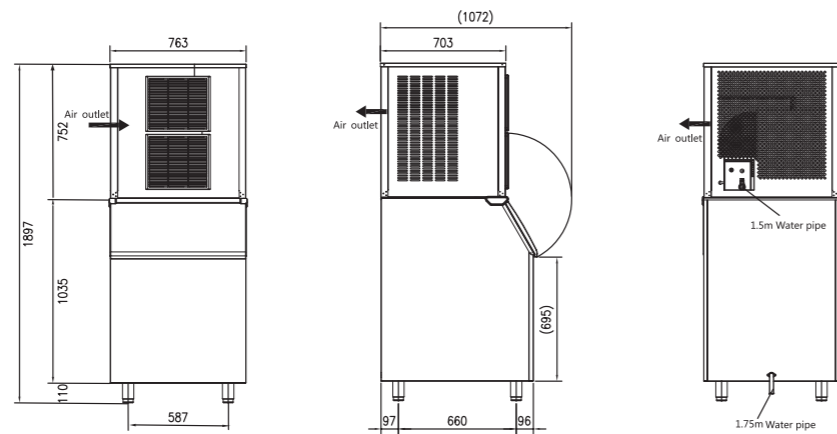


AP-0.6/1

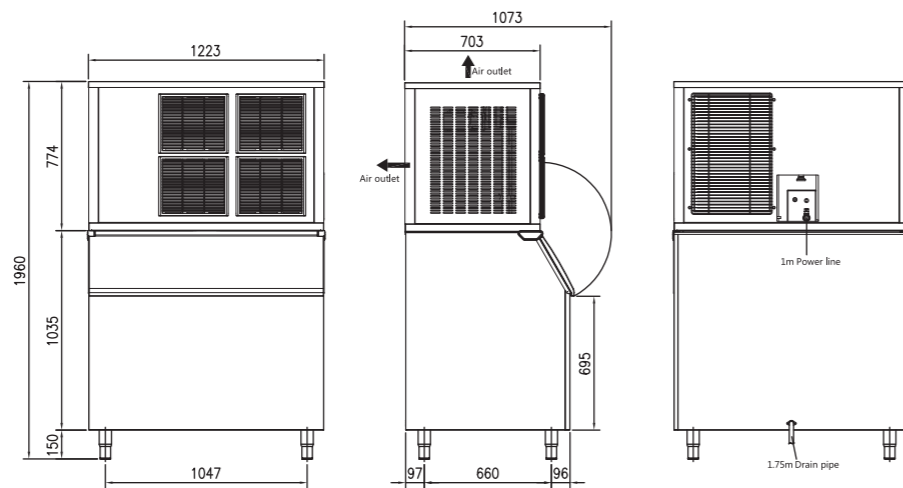

AM-350/450

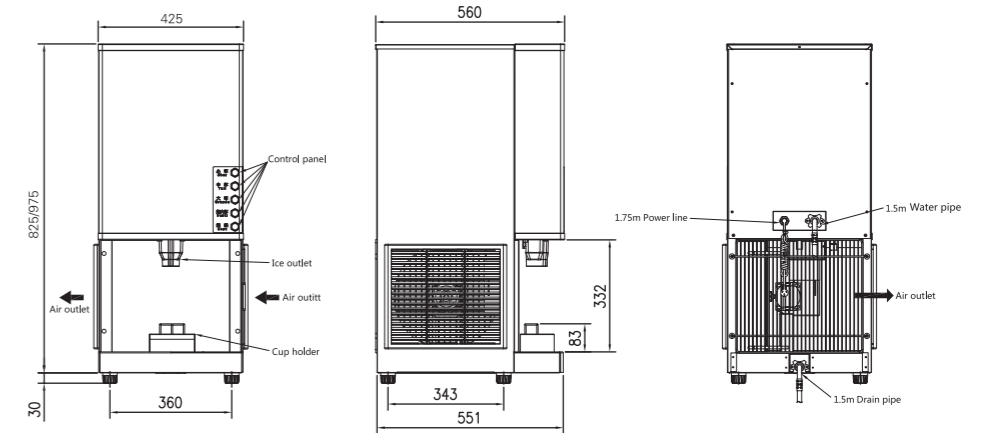

AM-500/700

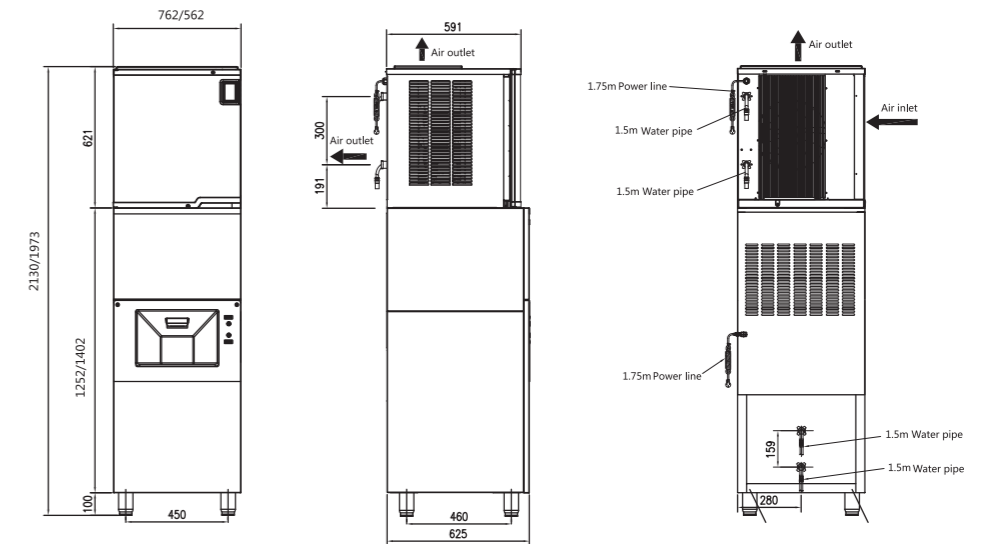

| Model | Production (lbs/kg) | Storage Capacity (lbs/kg) | Power | Ice Type | Cooling | Refrigerant | Dimensions W*D*H(mm) |
|--------|-----------------------|-----------------------------|-------|----------|-----------|-------------|--------------------------|
| AP-0.3 | 771 lbs/350Kg | 551 lbs/250Kg | 1050W | Scale | Air/Water | R410A | 760 × 885 × (1781+150) |
| AP-0.6 | 1322 lbs/600Kg | 881 lbs/400Kg | 1650W | Scale | Air/Water | R410A | 1220 × 885 × (1805+150) |
| AP-1 | 2204 lbs/1000Kg | 881 lbs/400Kg | 2850W | Scale | Air/Water | R410A | 1220 × 885 × (1805+150) |
| AP-2 | 4409 lbs/2000Kg | 1322 lbs/600Kg | 5500W | Scale | Air/Water | R410A | 1400 × 1380 × (2100+150) |

Note: AP series testing condition: 15°C and 10°C .

| Model | Production (lbs/kg) | Storage Capacity (lbs/kg) | Power | Ice Type | Cooling | Refrigerant | Dimensions W*D*H(mm) |
|--------|-----------------------|-----------------------------|-------|----------|-----------|-------------|------------------------|
| AM-350 | 330 lbs/150Kg | 11 lbs/5Kg | 660W | Nugget | Air | R290 | 425 × 600 × (800+30) |
| AM-450 | 440 lbs/200Kg | 22 lbs/10Kg | 830W | Nugget | Air | R290 | 425 × 600 × (950+30) |
| AM-500 | 485 lbs/220Kg | 132 lbs/60Kg | 950W | Cube/1/2 | Air/Water | R410A | 560 × 860 × (1985+150) |
| AM-700 | 705 lbs/320Kg | 198 lbs/90Kg | 1150W | Cube/1/2 | Air/Water | R410A | 760 × 860 × (2185+150) |

Note: AM series testing condition: 15°C and 10°C .

HISAKAGE[®] Refrigerator



Brand
Compressor




Defrosting water
evaporates
automatically



Intellectual
temperature
control



Automatic Door
Closure
and Standby
Function




Internal rounded
corner design




E—201 Static Cooling Refrigerator




LREP-120/LFEP-120

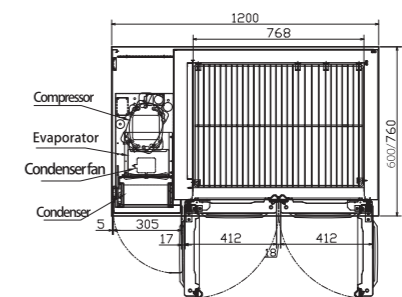

LREP-150/LFEP-150

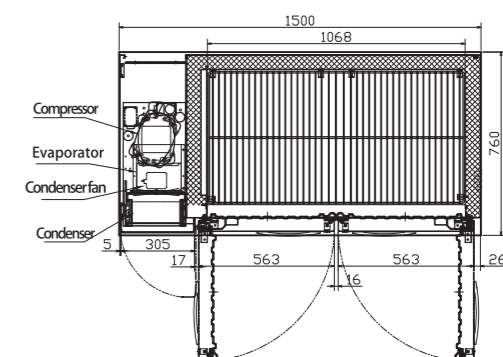

LREP-180/LFEP-180

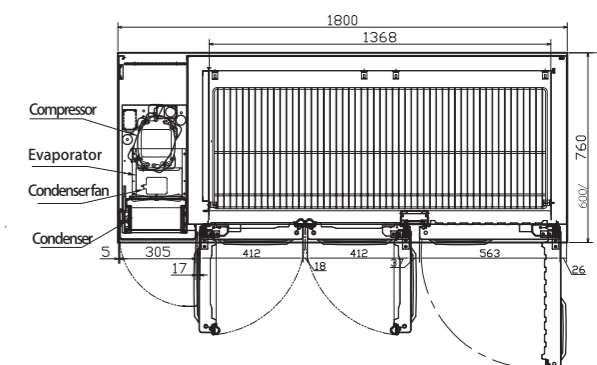

HISAKAGE


Your ideal choice for commercial refrigerator.

| Model | Function | Capacity (L) | Temperature °F/°C | Shelf | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|------------|----------|--------------|---------------------------------|-------|---------|-------------|-------|----------------------------|
| LREP-120 | R | 250/200 | 28—59°F/-2—15°C | 2 | Stadic | R290 | 220W | 1200 × 760/600 × (700+100) |
| LFEP-120 | F | 250/200 | 0—5°F/-18— -15°C | 2 | Stadic | R290 | 270W | 1200 × 760/600 × (700+100) |
| LREP-150 | R | 350/280 | 28—59°F/-2—15°C | 2 | Stadic | R290 | 220W | 1500 × 760/600 × (700+100) |
| LFEP-150 | F | 350/280 | 0—5°F/-18— -15°C | 2 | Stadic | R290 | 300W | 1500 × 760/600 × (700+100) |
| LREP-180 | R | 450/360 | 28—59°F/-2—15°C | 3 | Stadic | R290 | 270W | 1800 × 760/600 × (700+100) |
| LFEP-180 | F | 450/360 | 0—5°F/-18— -15°C | 3 | Stadic | R290 | 300W | 1800 × 760/600 × (700+100) |
| SREP-70 | R | 500 | 28—59°F/-2—15°C | 3 | Stadic | R290 | 260W | 700 × 760 × (1900+100) |
| SFEP-70 | F | 500 | 0—5°F/-18— -15°C | 3 | Stadic | R290 | 400W | 700 × 760 × (1900+100) |
| CT-SEP-70 | R/F | 450 | 32—59°F/0—5°F/0—15°C/-18— -15°C | 2 | Stadic | R290 | 580W | 700 × 760 × (1900+100) |
| SREP-120 | R | 1000 | 28—59°F/-2—15°C | 6 | Stadic | R290 | 460W | 1200 × 760 × (1900+100) |
| SFEP-120 | F | 1000 | 0—5°F/-18— -15°C | 6 | Stadic | R290 | 620W | 1200 × 760 × (1900+100) |
| CT-SEP-120 | R/F | 950 | 32—59°F/0—5°F/0—15°C/-18— -15°C | 6 | Stadic | R290 | 750W | 1200 × 760 × (1900+100) |
| SREP-180 | R | 1500 | 28—59°F/-2—15°C | 9 | Stadic | R290 | 760W | 1800 × 760 × (1900+100) |
| SFEP-180 | F | 1500 | 0—5°F/-18— -15°C | 9 | Stadic | R290 | 850W | 1800 × 760 × (1900+100) |
| CT-SEP-180 | R/F | 1400 | 32—59°F/0—5°F/0—15°C/-18— -15°C | 9 | Stadic | R290 | 1080W | 1800 × 760 × (1900+100) |


Note:L=Under counter type,S=Upright type,R=Refrigerator,F=Freezer,P=Stainless steel door,CT=Dual Temp,D=Static Cooling.




C—201 Air Cooling Refrigerator

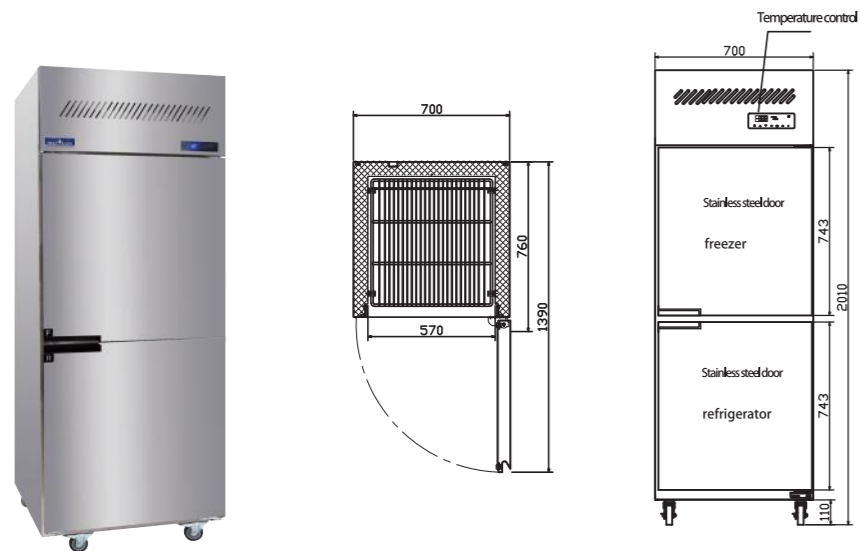



CT-SEP-70

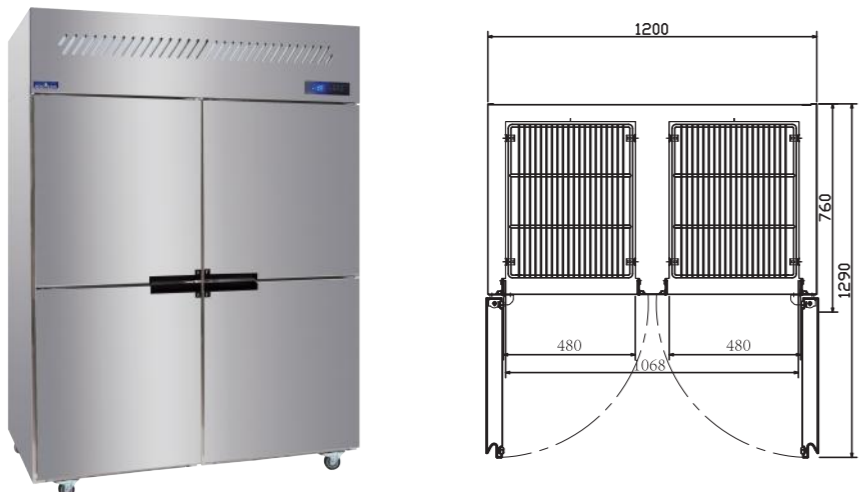


CT-SEP-120

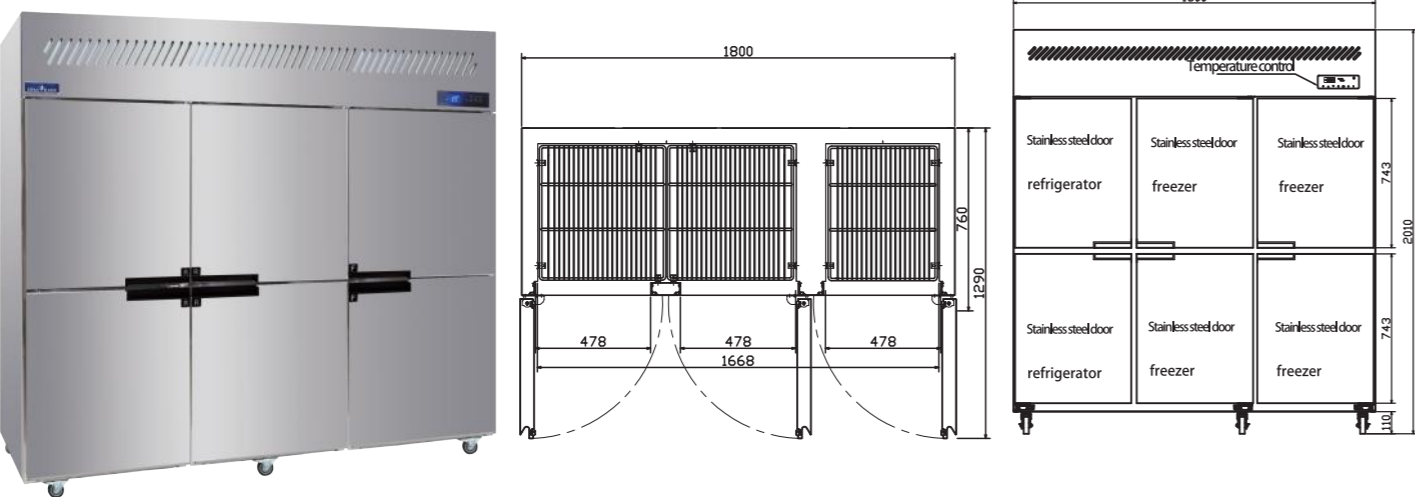


CT-SEP-180

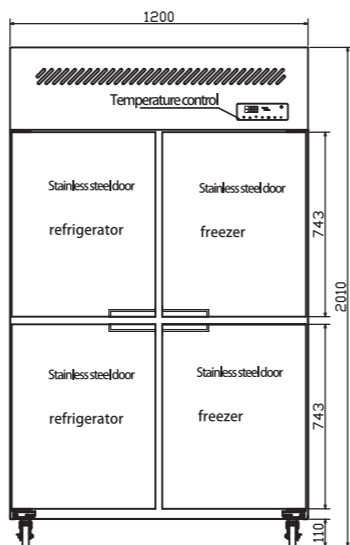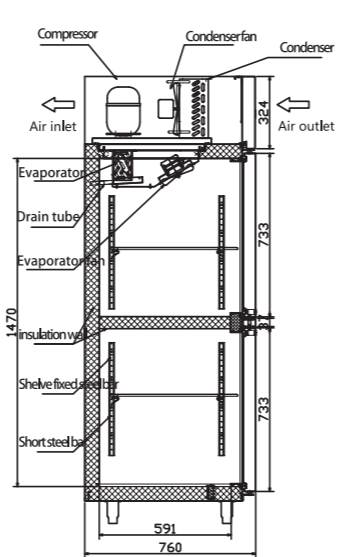


LRCP-120/LFCP-120

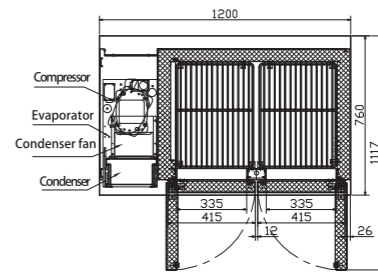

LRCP-136/150/LFCP-136/150

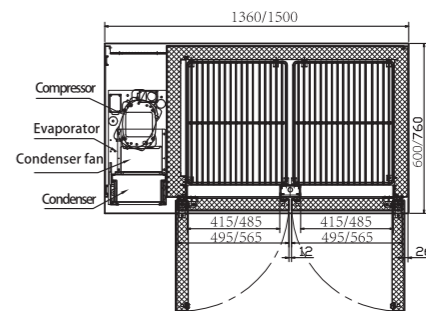


LRCP-180/200/LFCP-180/200

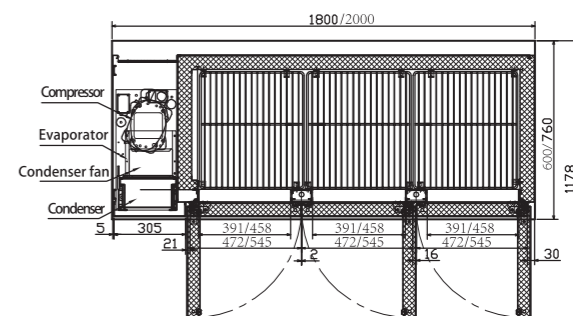


| Model | Function | Capacity (L) | Temperature °F/°C | Shelf | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|------------|----------|--------------|----------------------------------|-------|---------|-------------|-------|------------------------------|
| LRCP-120 | R | 250/200 | 21-59°F/-6-15°C | 2 | Air | R290 | 270W | 1200 x 760/600 x (700+100) |
| LFCP-120 | F | 250/200 | -8-0°F/-22- -18°C | 2 | Air | R290 | 300W | 1200 x 760/600 x (700+100) |
| LRCP-136 | R | 280/230 | 21-59°F/-6-15°C | 2 | Air | R290 | 270W | 1360 x 760/600 x (700+100) |
| LFCP-136 | F | 280/230 | -8-0°F/-22- -18°C | 2 | Air | R290 | 300W | 1360 x 760/600 x (700+100) |
| LRCP-150 | R | 350/280 | 21-59°F/-6-15°C | 2 | Air | R290 | 320W | 1500 x 760/600 x (700+100) |
| LFCP-150 | F | 350/280 | -8-0°F/-22- -18°C | 2 | Air | R290 | 450W | 1500 x 760/600 x (700+100) |
| LRCP-180 | R | 450/360 | 21-59°F/-6-15°C | 3 | Air | R290 | 320W | 1800 x 760/600 x (700+100) |
| LFCP-180 | F | 450/360 | -8-0°F/-22- -18°C | 3 | Air | R290 | 450W | 1800 x 760/600 x (700+100) |
| LRCP-200 | R | 500/400 | 21-59°F/-6-15°C | 3 | Air | R290 | 380W | 2000 x 760/600 x (700+100) |
| LFCP-200 | F | 500/400 | -8-0°F/-22- -18°C | 3 | Air | R290 | 520W | 2000 x 760/600 x (700+100) |
| SRCP-70 | R | 500 | 21-59°F/-6-15°C | 3 | Air | R290 | 270W | 700 x (760+50) x (1900+100) |
| SFCP-70 | F | 500 | -8-0°F/-22- -18°C | 3 | Air | R290 | 420W | 700 x (760+50) x (1900+100) |
| CT-SCP-70 | R/F | 450 | 32-59°F/-8-0°F/0-15°C/-22- -18°C | 2 | Air | R290 | 580W | 700 x (760+50) x (1900+100) |
| SRCP-120 | R | 1000 | 21-59°F/-6-15°C | 6 | Air | R290 | 480W | 1200 x (760+50) x (1900+100) |
| SFCP-120 | F | 1000 | -8-0°F/-22- -18°C | 6 | Air | R290 | 720W | 1200 x (760+50) x (1900+100) |
| CT-SCP-120 | R/F | 950 | 32-59°F/-8-0°F/0-15°C/-22- -18°C | 6 | Air | R290 | 800W | 1200 x (760+50) x (1900+100) |
| SRCP-140 | R | 1150 | 21-59°F/-6-15°C | 6 | Air | R290 | 520W | 1400 x (760+50) x (1900+100) |
| SFCP-140 | F | 1150 | -8-0°F/-22- -18°C | 6 | Air | R290 | 780W | 1400 x (760+50) x (1900+100) |
| CT-SCP-140 | R/F | 1050 | 32-59°F/-8-0°F/0-15°C/-22- -18°C | 6 | Air | R290 | 850W | 1400 x (760+50) x (1900+100) |
| SRCP-180 | R | 1500 | 21-59°F/-6-15°C | 9 | Air | R290 | 780W | 1800 x (760+50) x (1900+100) |
| SFCP-180 | F | 1500 | -8-0°F/-22- -18°C | 9 | Air | R290 | 1050W | 1800 x (760+50) x (1900+100) |
| CT-SCP-180 | R/F | 1400 | 32-59°F/-8-0°F/0-15°C/-22- -18°C | 9 | Air | R290 | 1080W | 1800 x (760+50) x (1900+100) |

Note:L=Under counter,S=Upright refrigerator,R=Refrigerator,F=Freezer,P=Stainless steel door,CT=Dual Temp,A=Air Cooling.

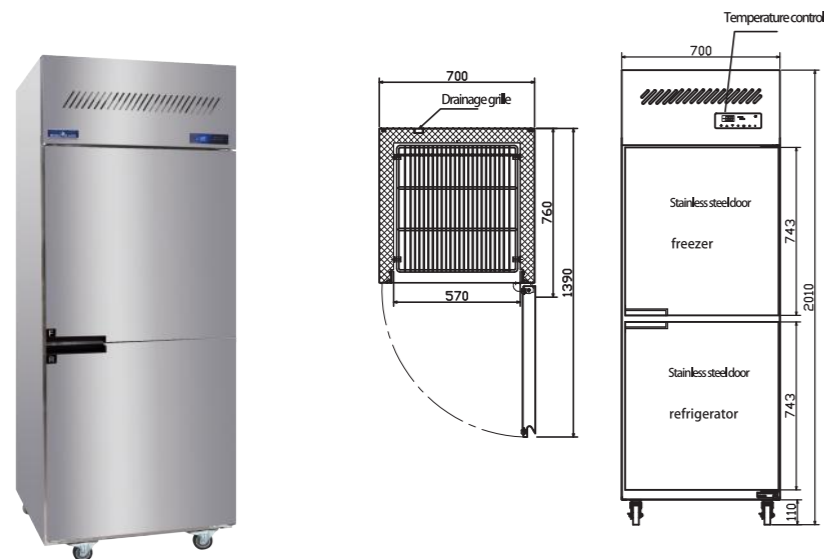


CT-SCP-70

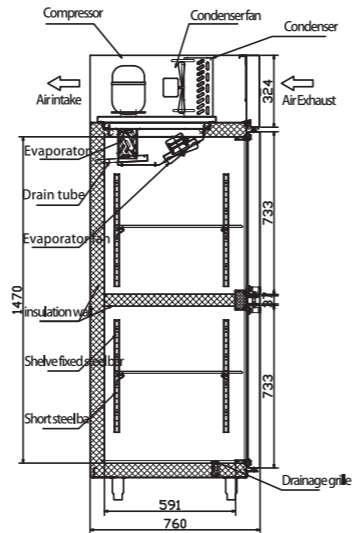


CG—201 Air Cooling Glass Door Refrigerator




LRCG-120

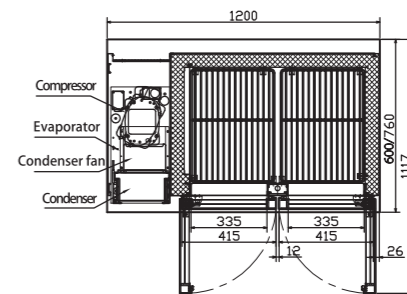


CT-SCP-120/CT-SCP-140

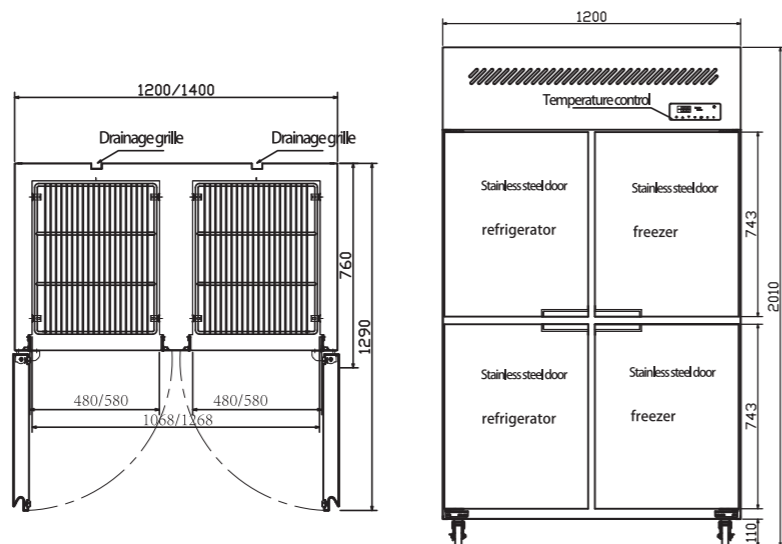


LRCG-136/LRCG-150

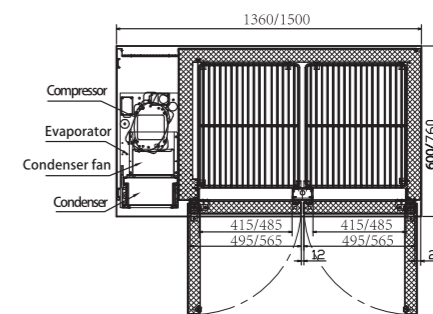

CT-SCP-180

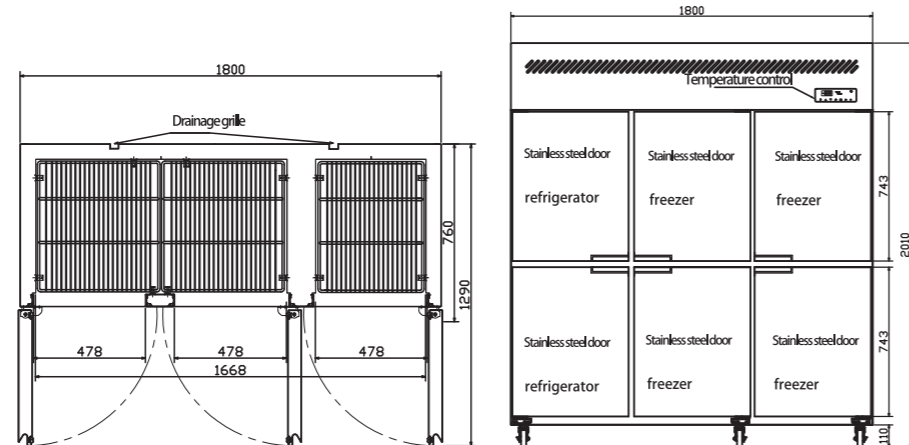

LRCG-180/LRCG-200

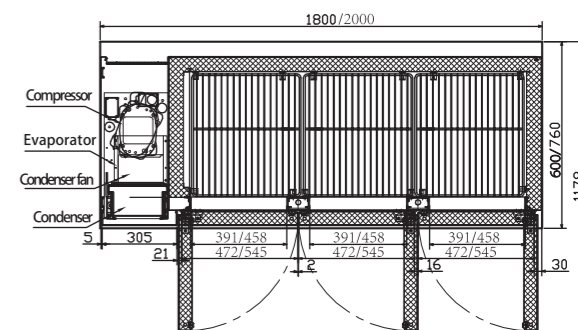

| Model | Function | Capacity (L) | Temperature F/°C | Shelf | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|----------|----------|--------------|-------------------|-------|---------|-------------|-------|------------------------------|
| LRCG-120 | R | 250/200 | 28—59°F / -2—15°C | 2 | Air | R290 | 280W | 1200 × 760/600 × (700+100) |
| LRCG-136 | R | 280/230 | 28—59°F / -2—15°C | 2 | Air | R290 | 280W | 1360 × 760/600 × (700+100) |
| LRCG-150 | R | 350/280 | 28—59°F / -2—15°C | 2 | Air | R290 | 340W | 1500 × 760/600 × (700+100) |
| LRCG-180 | R | 450/360 | 28—59°F / -2—15°C | 3 | Air | R290 | 420W | 1800 × 760/600 × (700+100) |
| LRCG-200 | R | 500/400 | 28—59°F / -2—15°C | 3 | Air | R290 | 420W | 2000 × 760/600 × (700+100) |
| SRCG-70 | R | 500 | 28—59°F / -2—15°C | 3 | Air | R290 | 400W | 700 × (760+50) × (1900+100) |
| SRCG-120 | R | 1000 | 28—59°F / -2—15°C | 6 | Air | R290 | 640W | 1200 × (760+50) × (1900+100) |
| SRCG-140 | R | 1150 | 28—59°F / -2—15°C | 6 | Air | R290 | 680W | 1400 × (760+50) × (1900+100) |
| SRCG-180 | R | 1500 | 28—59°F / -2—15°C | 9 | Air | R290 | 850W | 1800 × (760+50) × (1900+100) |

Note:L=Under counter,S=Upright refrigerator,G=Glass door,A=Air cooling.







CB—201 Air Cooling Bakery Refrigerator



SRCG-70

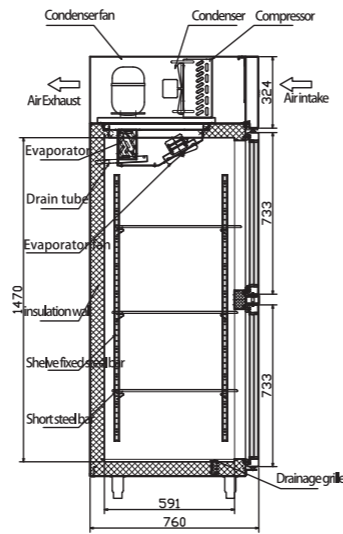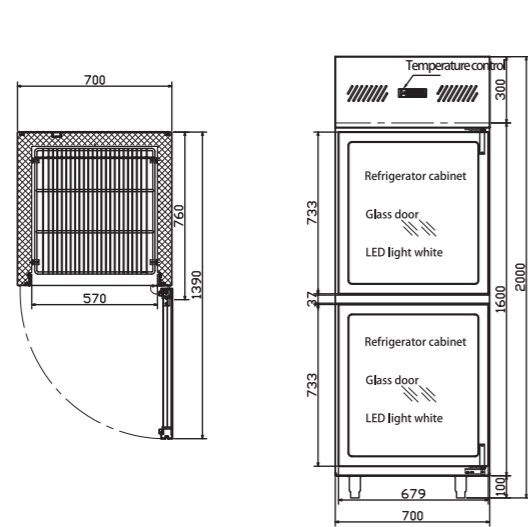



CB-150 R/F



CB-200 R/F



SRCG-120

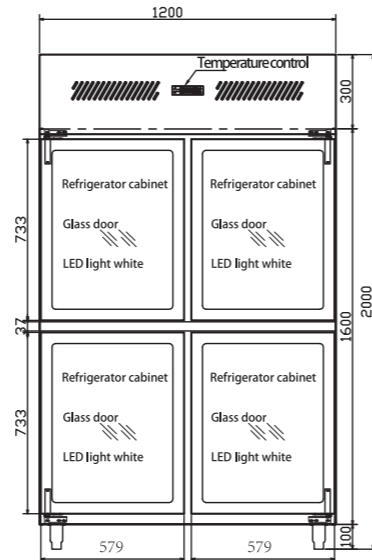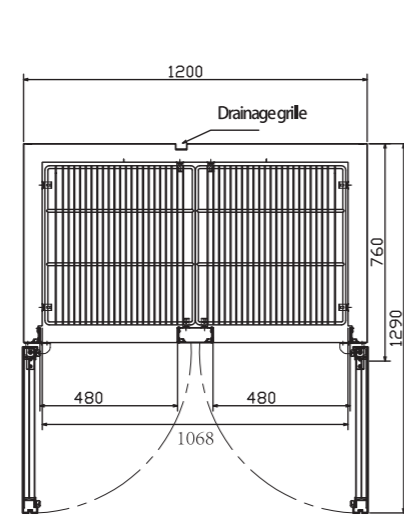



CB-120 R/F



CB-180 R/F



SRCG-180

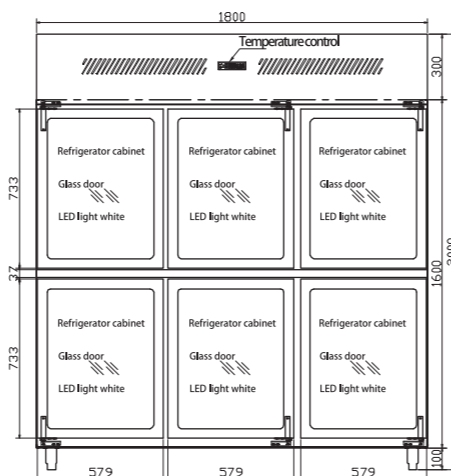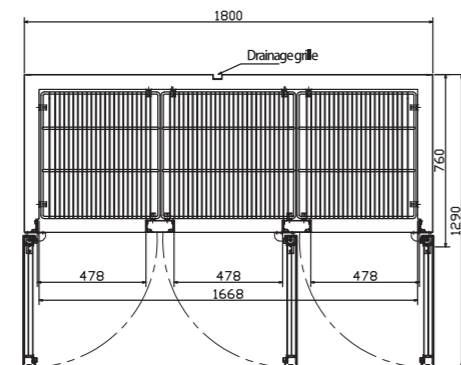

| Model | Function | Capacity (L) | Temperature F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|----------|----------|--------------|----------------------------------|---------|-------------|-------|-------------------------|
| CB-150R | R | 10/layers | 21—59°F/-6—15°C | Air | R290 | 320W | 1500 × 800 × (700+100) |
| CB-150F | F | 10/layers | -8—0°F/-22— -18°C | Air | R290 | 450W | 1500 × 800 × (700+100) |
| CB-200R | R | 15/layers | 21—59°F/-6—15°C | Air | R290 | 380W | 2000 × 800 × (700+100) |
| CB-200F | F | 15/layers | -8—0°F/-22— -18°C | Air | R290 | 520W | 2000 × 800 × (700+100) |
| CB-70R | R | 11/layers | 21—59°F/-6—15°C | Air | R290 | 320W | 700 × 800 × (1900+100) |
| CB-70F | F | 11/layers | -8—0°F/-22— -18°C | Air | R290 | 460W | 700 × 800 × (1900+100) |
| CB-70RF | RF | 11/layers | 32—59°F/-8—0°F/0—15°C/-22— -18°C | Air | R290 | 530W | 700 × 800 × (1900+100) |
| CB-120R | R | 22/layers | 21—59°F/-6—15°C | Air | R290 | 480W | 1200 × 800 × (1900+100) |
| CB-120F | F | 22/layers | -8—0°F/-22— -18°C | Air | R290 | 760W | 1200 × 800 × (1900+100) |
| CB-120RF | RF | 22/layers | 32—59°F/-8—0°F/0—15°C/-22— -18°C | Air | R290 | 800W | 1200 × 800 × (1900+100) |
| CB-180R | R | 32/layers | 21—59°F/-6—15°C | Air | R290 | 850W | 1800 × 800 × (1900+100) |
| CB-180F | F | 32/layers | -8—0°F/-22— -18°C | Air | R290 | 1100W | 1800 × 800 × (1900+100) |
| CB-180RF | RF | 32/layers | 32—59°F/-8—0°F/0—15°C/-22— -18°C | Air | R290 | 1080W | 1800 × 800 × (1900+100) |

Note:R=Refrigerator,F=Freezer,A=Air cooling.

CS—201 Air Cooling Salad Refrigerator



CS-150W



CS-180W

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|-------------------|---------|-------------|-------|----------------------------|
| CS-120P | R | 250/200 | 28—59°F/-2—15°C | Air | R290 | 300W | 1200 × 760/600 × (700+100) |
| CS-120W | R | 250/200 | 28—59°F/-2—15°C | Air | R290 | 300W | 1200 × 760/600 × (700+100) |
| CS-150P | R | 350/280 | 28—59°F/-2—15°C | Air | R290 | 350W | 1500 × 760/600 × (700+100) |
| CS-150W | R | 350/280 | 28—59°F/-2—15°C | Air | R290 | 350W | 1500 × 760/600 × (700+100) |
| CS-180P | R | 450/360 | 28—59°F/-2—15°C | Air | R290 | 400W | 1800 × 760/600 × (700+100) |
| CS-180W | R | 450/360 | 28—59°F/-2—15°C | Air | R290 | 400W | 1800 × 760/600 × (700+100) |

Note:R=Refrigerator,A=Air cooling.

CW—201 Air Cooling Wall-mounted, Sliding Door Cabinet



CW-120T



CW-150

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|--------|----------|--------------|-------------------|---------|-------------|-------|----------------------|
| CW-120 | R | 120 | 28—59°F/-2—15°C | Air | R290 | 280W | 1200 × 500 × 500 |
| CW-150 | R | 160 | 28—59°F/-2—15°C | Air | R290 | 325W | 1500 × 500 × 500 |
| CW-180 | R | 200 | 28—59°F/-2—15°C | Air | R290 | 350W | 1800 × 500 × 500 |

Note: Note: R=Refrigerator,T=Customized.

CP—201 Air Cooling Pizza Refrigerator



CP-150T



CP-180T

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|--------|----------|--------------|-------------------|---------|-------------|-------|----------------------------|
| CP-150 | R | 350/380 | 28—59°F/-2—15°C | Air | R290 | 350W | 1500 × 760/800 × (800+256) |
| CP-180 | R | 450/480 | 28—59°F/-2—15°C | Air | R290 | 400W | 1800 × 760/800 × (800+256) |
| CP-200 | R | 600 | 28—59°F/-2—15°C | Air | R290 | 450W | 2000 × 880 × (800+245) |

Note:R=Refrigerator,A=Air cooling,T=Customized.

CL—201 Air Cooling Chef base



CL-150-T4



CL-180


| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|--------|----------|--------------|-------------------|---------|-------------|-------|---------------------------|
| CL-150 | R | 240/190 | 28—59°F/-2—15°C | Air | R290 | 280W | 1500 × 760/600 × (480+70) |
| CL-180 | R | 300/240 | 28—59°F/-2—15°C | Air | R290 | 325W | 1800 × 760/600 × (480+70) |
| CL-225 | R | 370/300 | 28—59°F/-2—15°C | Air | R290 | 350W | 2250 × 760/600 × (480+70) |

Note:R=Refrigerator,A=Air cooling.


V—304 Air Cooling Refrigerator




LRVP-90/LFVP-90

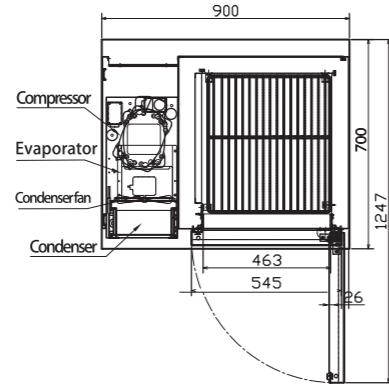




LRVP-120/136/150/LFVP-120/136/150

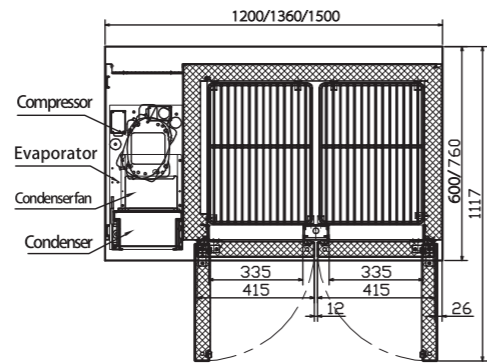



LRVP-180/200/LFVP-180/200

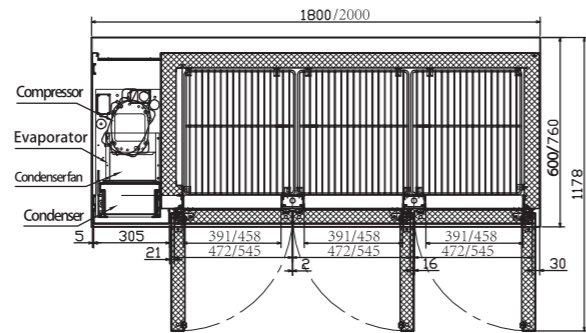



CT-SVP-70

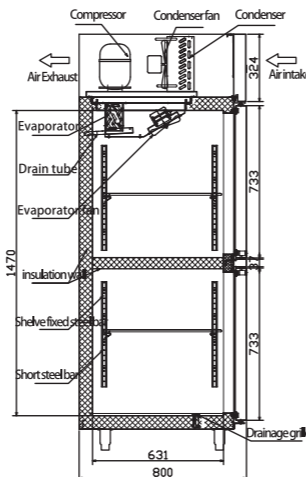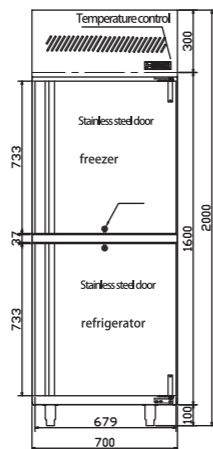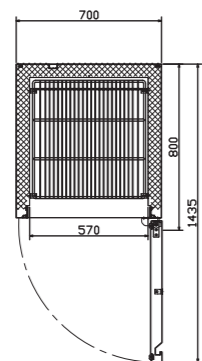

CT-SVP-120/CT-SVP-140

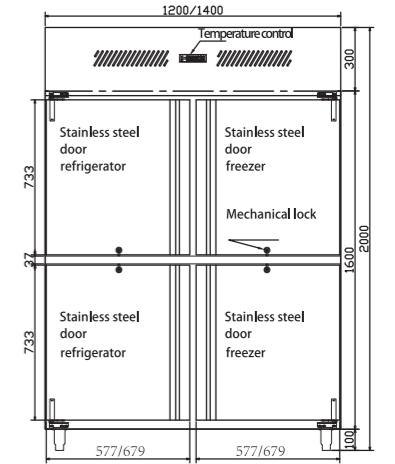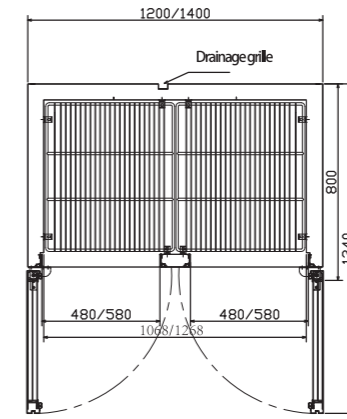

CT-SVP-180

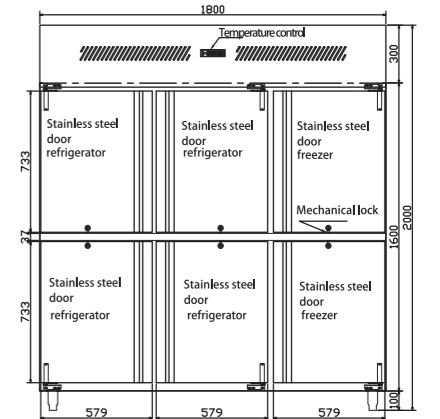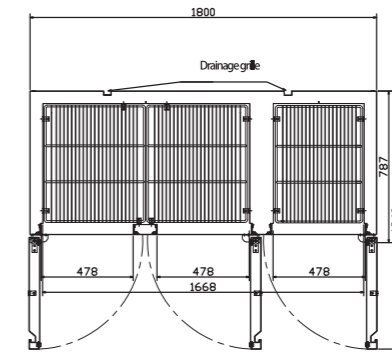


| Model | Function | Capacity (L) | Temperature °F/°C | Shelf | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|------------|----------|--------------|---------------------------------|-------|---------|-------------|-------|----------------------------|
| LRVP-90 | R | 180 | 21—59°F/-6—15°C | 1 | Air | R290 | 260W | 900 × 700 × (700+30) |
| LFVP-90 | F | 180 | -8—0°F/-22—-18°C | 1 | Air | R290 | 320W | 900 × 700 × (700+30) |
| LRVP-120 | R | 250/200 | 21—59°F/-6—15°C | 2 | Air | R290 | 270W | 1200 × 760/600 × (700+100) |
| LFVP-120 | F | 250/200 | -8—0°F/-22—-18°C | 2 | Air | R290 | 300W | 1200 × 760/600 × (700+100) |
| LRVP-136 | R | 280/230 | 21—59°F/-6—15°C | 2 | Air | R290 | 270W | 1360 × 760/600 × (700+100) |
| LFVP-136 | F | 280/230 | -8—0°F/-22—-18°C | 2 | Air | R290 | 300W | 1360 × 760/600 × (700+100) |
| LRVP-150 | R | 350/280 | 21—59°F/-6—15°C | 2 | Air | R290 | 320W | 1500 × 760/600 × (700+100) |
| LFVP-150 | F | 350/280 | -8—0°F/-22—-18°C | 2 | Air | R290 | 450W | 1500 × 760/600 × (700+100) |
| LRVP-180 | R | 450/360 | 21—59°F/-6—15°C | 3 | Air | R290 | 320W | 1800 × 760/600 × (700+100) |
| LFVP-180 | F | 450/360 | -8—0°F/-22—-18°C | 3 | Air | R290 | 450W | 1800 × 760/600 × (700+100) |
| LRVP-200 | R | 500/400 | 21—59°F/-6—15°C | 3 | Air | R290 | 380W | 2000 × 760/600 × (700+100) |
| LFVP-200 | F | 500/400 | -8—0°F/-22—-18°C | 3 | Air | R290 | 580W | 2000 × 760/600 × (700+100) |
| SRVP-70 | R | 500 | 21—59°F/-6—15°C | 3 | Air | R290 | 200W | 700 × 800 × (1900+100) |
| SFVP-70 | F | 500 | -8—0°F/-22—-18°C | 3 | Air | R290 | 420W | 700 × 800 × (1900+100) |
| CT-SVP-70 | R/F | 450 | 32—59°F/-8—0°F/0—15°C/-22—-18°C | 2 | Air | R290 | 580W | 700 × 800 × (1900+100) |
| SRVP-120 | R | 1000 | 21—59°F/-6—15°C | 6 | Air | R290 | 480W | 1200 × 800 × (1900+100) |
| SFVP-120 | F | 1000 | -8—0°F/-22—-18°C | 6 | Air | R290 | 720W | 1200 × 800 × (1900+100) |
| CT-SVP-120 | R/F | 950 | 32—59°F/-8—0°F/0—15°C/-22—-18°C | 6 | Air | R290 | 800W | 1200 × 800 × (1900+100) |
| SRVP-140 | R | 1150 | 21—59°F/-6—15°C | 6 | Air | R290 | 520W | 1400 × 800 × (1900+100) |
| SFVP-140 | F | 1150 | -8—0°F/-22—-18°C | 6 | Air | R290 | 780W | 1400 × 800 × (1900+100) |
| CT-SVP-140 | R/F | 1050 | 32—59°F/-8—0°F/0—15°C/-22—-18°C | 6 | Air | R290 | 850W | 1400 × 800 × (1900+100) |
| SRVP-180 | R | 1500 | 21—59°F/-6—15°C | 9 | Air | R290 | 780W | 1800 × 800 × (1900+100) |
| SFVP-180 | F | 1500 | -8—0°F/-22—-18°C | 9 | Air | R290 | 1050W | 1800 × 800 × (1900+100) |
| CT-SVP-180 | R/F | 1400 | 32—59°F/-8—0°F/0—15°C/-22—-18°C | 9 | Air | R290 | 1080W | 1800 × 800 × (1900+100) |

Note:L= Under counter type,S=Upright refrigerator,R=Refrigerator,F=Freezer,P=Stainless steel door,CT=Dual temp,A=Air cooling.


VG—304 Air Cooling Glass Door Refrigerator




LRVG-90

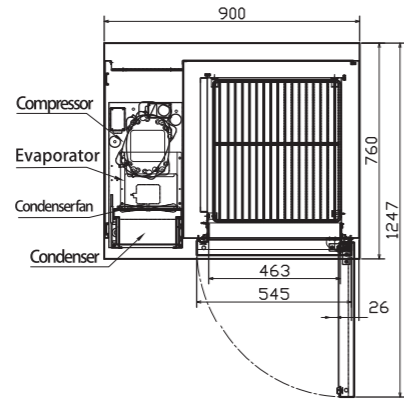




LRVG-120/LRVG-136//LRVP-150

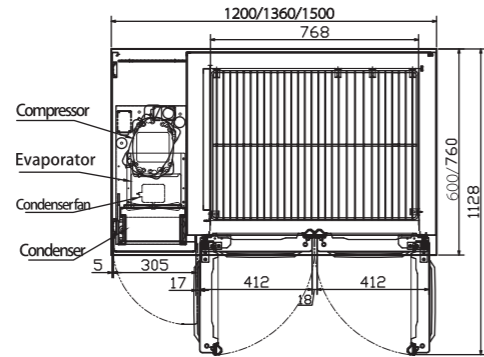



LRVG-180/LRVG-200

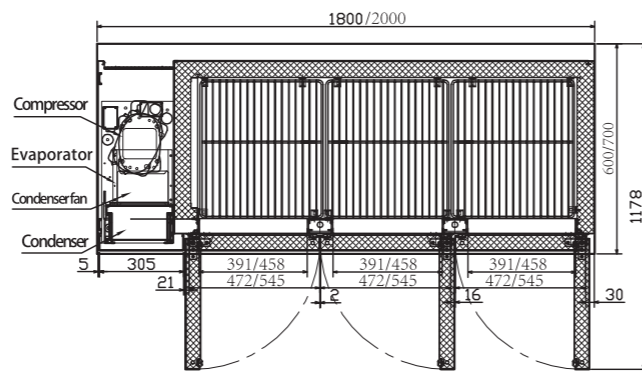



SRVG-70

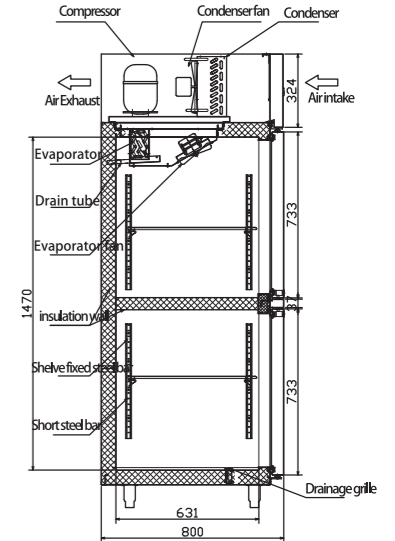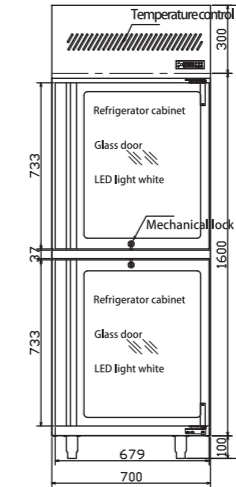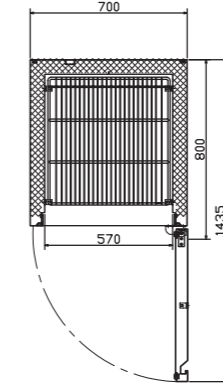

SRVG-120/SRVG-140

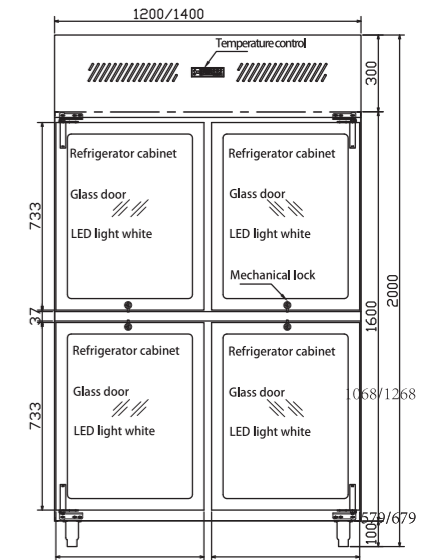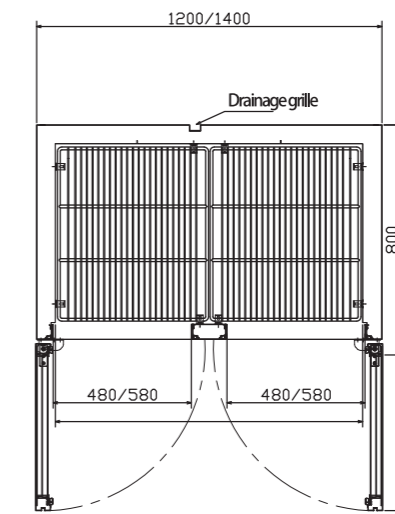

SRVG-180

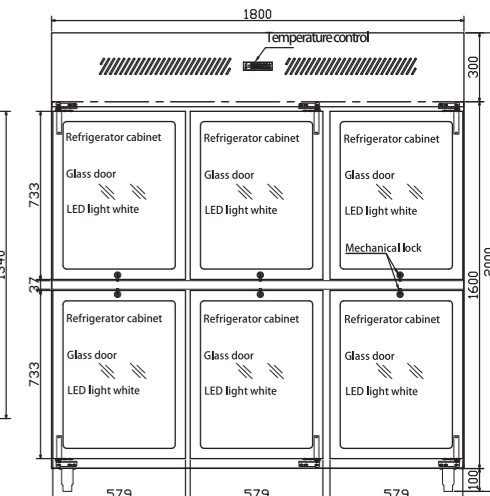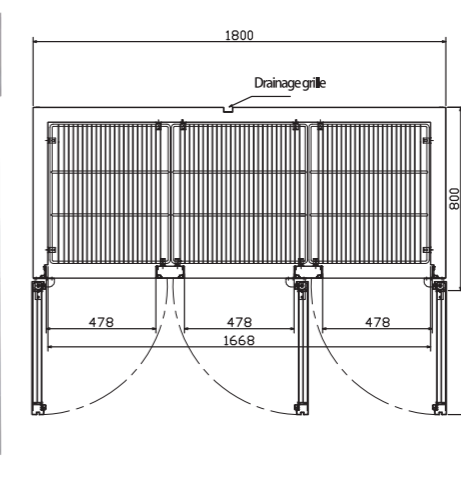

| Model | Function | Capacity (L) | Temperature °F/°C | Shelf | Cooling | Power | Dimensions W*D*H(mm) |
|----------|----------|--------------|-------------------|-------|---------|-------|----------------------------|
| LRVG-90 | R | 220 | 28—59°F / -2—15°C | 1 | Air | 270W | 900 × 700 × (700+100) |
| LRVG-120 | R | 250/200 | 28—59°F / -2—15°C | 2 | Air | 280W | 1200 × 760/600 × (700+100) |
| LRVG-136 | R | 280/230 | 28—59°F / -2—15°C | 2 | Air | 280W | 1360 × 760/600 × (700+100) |
| LRVG-150 | R | 350/280 | 28—59°F / -2—15°C | 2 | Air | 340W | 1500 × 760/600 × (700+100) |
| LRVG-180 | R | 450/360 | 28—59°F / -2—15°C | 3 | Air | 420W | 1800 × 760/600 × (700+100) |
| LRVG-200 | R | 500/400 | 28—59°F / -2—15°C | 3 | Air | 420W | 2000 × 760/600 × (700+100) |
| SRVG-70 | R | 500 | 28—59°F / -2—15°C | 3 | Air | 400W | 700 × 800 × (1900+100) |
| SRVG-120 | R | 1000 | 28—59°F / -2—15°C | 6 | Air | 640W | 1200 × 800 × (1900+100) |
| SRVG-140 | R | 1150 | 28—59°F / -2—15°C | 6 | Air | 680W | 1400 × 800 × (1900+100) |
| SRVG-180 | R | 1500 | 28—59°F / -2—15°C | 9 | Air | 850W | 1800 × 800 × (1900+100) |

Note:L= Under counter type,S=Upright refrigerator,R=Refrigerator,G=Glass door,A=Air cooling.

BC—304 Air Cooling Bar Glass Door Refrigerator



BC-90



BC-135

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|--------|----------|--------------|-------------------|---------|-------------|-------|----------------------|
| BC-60 | R | 100 | 28—59°F/-2—15°C | Air | R290 | 270W | 600 × 500 × 780 |
| BC-90 | R | 150 | 28—59°F/-2—15°C | Air | R290 | 320W | 900 × 500 × 780 |
| BC-135 | R | 200 | 28—59°F/-2—15°C | Air | R290 | 350W | 1350 × 500 × 780 |

Note:R=Refrigerator,A=Air cooling.

BH—304 Air Cooling Open Kitchen Refrigerator



BH-104 R/F



BH-155 R/F

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|-------------------|---------|-------------|-------|----------------------|
| BH-104R | R | 220 | 21—59°F/-6—15°C | Air | R290 | 280W | 1040 × 660 × 750 |
| BH-104F | F | 220 | -8—0°F/-22— -18°C | Air | R290 | 440W | 1040 × 660 × 750 |
| BH-155R | R | 320 | 21—59°F/-6—15°C | Air | R290 | 320W | 1555 × 660 × 750 |
| BH-155F | F | 320 | -8—0°F/-22— -18°C | Air | R290 | 460W | 1555 × 660 × 750 |
| BH-207R | R | 420 | 21—59°F/-6—15°C | Air | R290 | 350W | 2070 × 660 × 750 |
| BH-207F | F | 420 | -8—0°F/-22— -18°C | Air | R290 | 520W | 2070 × 660 × 750 |

Note:R=Refrigerator,F=Freezer,A=Air cooling.

CQ—304 Air Cooling Blast Freezer



CQ-5T



CQ-8T/CQ-11T



CQ-15T

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Power | Dimensions W*D*H(mm) |
|-------|----------|----------------|---------------------|---------|------------|------------------------|
| CQ-5 | F | 5*GN1/1 Comal | -40—31°F/-40— -35°C | Air | 1250W | 900 × 750 × (800+50) |
| CQ-8 | F | 8*GN1/1 Comal | -40—31°F/-40— -35°C | Air | 1900W | 800 × 800 × (1185+100) |
| CQ-11 | F | 11*GN1/1 Comal | -40—31°F/-40— -35°C | Air | 2600W | 800 × 800 × (1515+100) |
| CQ-15 | F | 15*GN1/1 Comal | -40—31°F/-40— -35°C | Air | 380V/3500W | 800 × 800 × (1800+100) |

Note:F=Freezer,A=Air cooling,CQ-15 base standard 380V.

CD—Deep Freezer



CD-140 (-45°C/-65°C)



CD-70 (-45°C/-65°C)

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|--------|----------|--------------|---------------------|---------|-------------|-------|------------------------|
| CD-90 | F | 300 | -49/-85°F/-45/-65°C | Direct | R290 | 360W | 905 × 750 × (805+50) |
| CD-140 | F | 450 | -49/-85°F/-45/-65°C | Direct | R290 | 450W | 1405 × 750 × (805+50) |
| CD-70 | F | 400 | -49/-85°F/-45/-65°C | Direct | R290 | 450W | 620 × 690 × (1700+100) |

Note:F=Freezer,D=Static cooling.

BP—304 Air Cooling Heated Banquet Carts, mobile Refrigerator



BG—304 Air Cooling Trolley Freezer



BP-80H



BP-150H




BP-80R




BP-150R



BG-90R/BG-90F

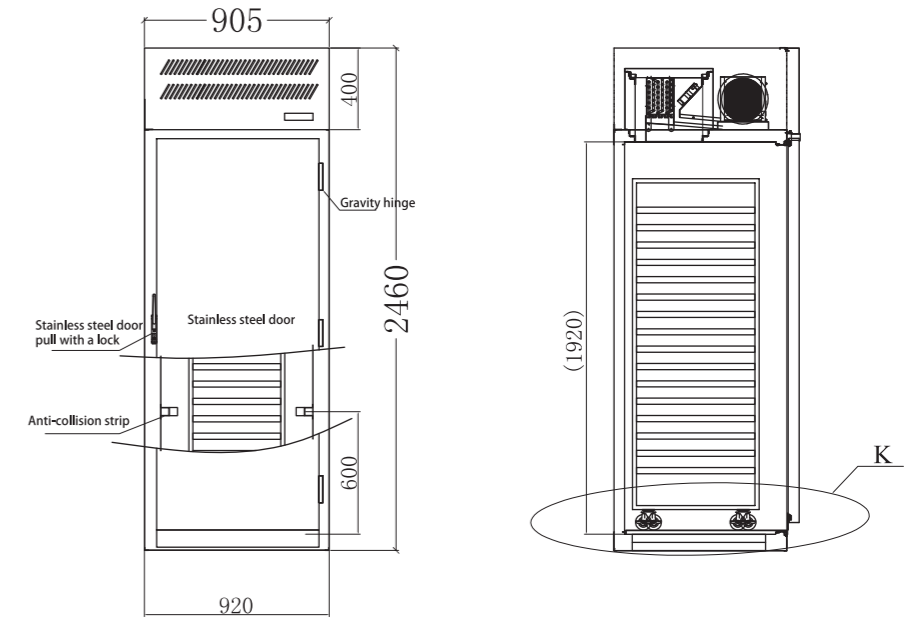

BG-185R/BG-185F

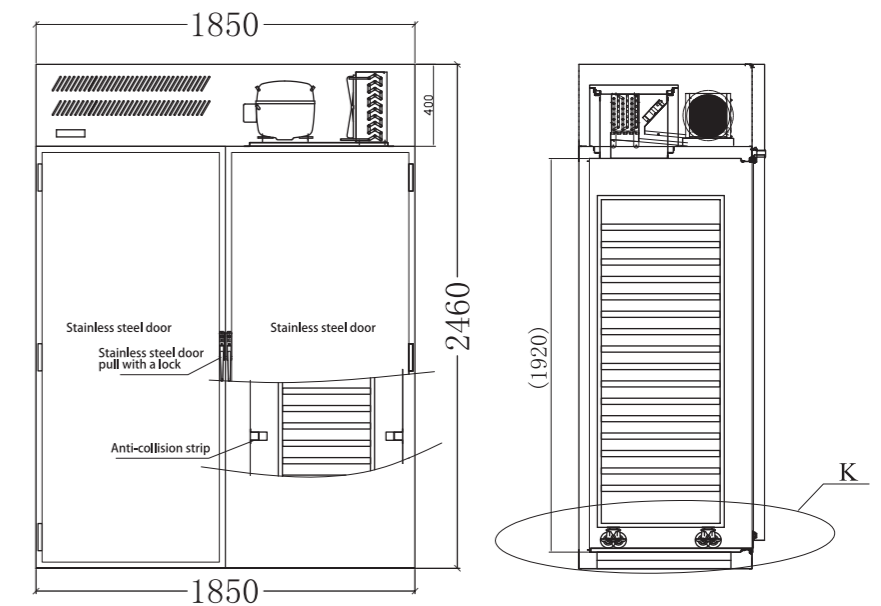

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|-------------------|---------|-------|-------------------------|
| BP-80H | H | 16*GN2/1 | 194—140°F/90—60°C | Air | 3000W | 737 × 815 × (1680+100) |
| BP-80R | R | 16*GN2/1 | 32—59°F/0—15°C | Air | 400W | 737 × 815 × (1890+100) |
| BP-150H | H | 32*GN2/1 | 194—140°F/90—60°C | Air | 3940W | 1474 × 815 × (1680+100) |
| BP-150R | R | 32*GN2/1 | 32—59°F/0—15°C | Air | 730W | 1474 × 815 × (1890+100) |

Note:H=Heated,R=Refrigerator,A=Air cooling.


| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|-------------------|---------|-------|----------------------|
| BG-90R | R | 1*GN2/1 cart | 21—59°F/-6—15°C | Air | 750W | 905 × 985 × 2460 |
| BG-90F | F | 1*GN2/1 cart | -8—0°F/-22— -18°C | Air | 1050W | 905 × 985 × 2460 |
| BG-185R | R | 2*GN2/1 cart | 21—59°F/-6—15°C | Air | 1250W | 1850 × 985 × 2460 |
| BG-185F | F | 2*GN2/1 cart | -8—0°F/-22— -18°C | Air | 1600W | 1850 × 985 × 2460 |

Note:R=Refrigerator,F=Freezer,A=Air cooling.

HISAKAGE® Showcase



Core components are imported brands



LED Energy-Saving Lights



Intellectual temperature control



Humidity Control



Compliant with International Certification Standards


Instructions for using display cabinets

| | | | | | |
|-------------------|-------|--------------|--------|--------------------------|---------|
| Cake | 2~6°C | Chincse wine | 0~4°C | Red wine | 12~18°C |
| Sandwich | 4~8°C | Whisky | 0~4°C | Saki | 12~18°C |
| Dairy | 4~8°C | beef | -5~0°C | Chocolates | 12~18°C |
| Vegetable & Fruit | 4~8°C | seafood | -5~0°C | Room temperature cabinet | 20~25°C |


Note: Standard temperature for display is 0~15°C. Options for medium temperature cabinets (-5~0°C), freezer cabinets (-15~-20°C) and heated cabinets (50~60°C).




Conductive films for safety



Customizable exterior materials



Featuring grooving process





Customizable wine racks




Silent Design



DS—Frozen Plate, Sushi Showcase

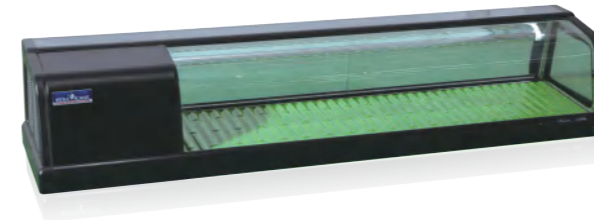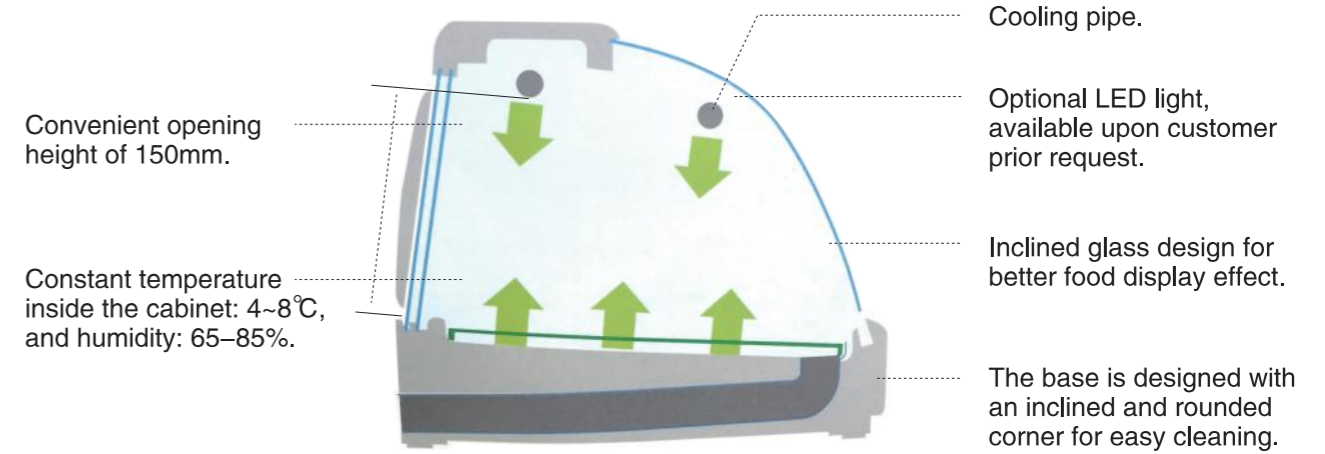

Circular sushi showcase

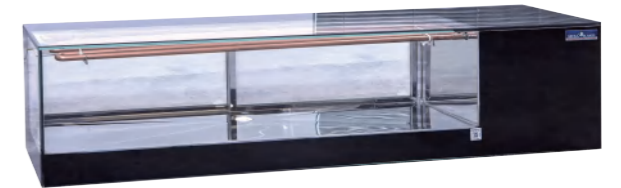

Rectangular sushi showcase



Ice plate



Ice plate (Sus countertop)

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|-----------|----------|--------------|--------------------|---------|-------------|-------|----------------------|
| IF-100 | R | Ice plate | 14—50°F / -10—10°C | Stadic | R134A | 200W | 1000 × 550 × 90 |
| DS-120A/L | R | 1 layer | 35—41°F / 2—5°C | Stadic | R134A | 120W | 1200 × 350 × 285 |
| DS-150A/L | R | 1 layer | 35—41°F / 2—5°C | Stadic | R134A | 160W | 1500 × 350 × 285 |
| DS-180A/L | R | 1 layer | 35—41°F / 2—5°C | Stadic | R134A | 180W | 1800 × 350 × 285 |
| DS-210A/L | R | 1 layer | 35—41°F / 2—5°C | Stadic | R134A | 200W | 2100 × 350 × 285 |

Note: A=Arc, L= Rectangular, R=Refrigerator, D=Static cooling.

DCL—Rectangular Showcase



Marble showcase



Right-angle showcase



Ladder showcase



Right-angle cake showcase

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|-------------------|---------|-------------|-------|----------------------|
| DCL-90 | R | 2/3 layers | 35—59°F/2—15°C | Air | R134A | 650W | 900 × 750 × 1250 |
| DCL-120 | R | 2/3 layers | 35—59°F/2—15°C | Air | R134A | 650W | 1200 × 750 × 1250 |
| DCL-150 | R | 2/3 layers | 35—59°F/2—15°C | Air | R404A | 800W | 1500 × 750 × 1250 |
| DCL-180 | R | 2/3 layers | 35—59°F/2—15°C | Air | R404A | 1150W | 1800 × 750 × 1250 |
| DCL-210 | R | 2/3 layers | 35—59°F/2—15°C | Air | R404A | 1350W | 2100 × 750 × 1250 |

Note:R=Refrigerator,A=Air cooling,standard for rear sliding door type.

DCA—Arc Showcase



Arc showcase



Beef showcase



4 Layers showcase




Cake showcase

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|-------------------|---------|-------------|-------|----------------------|
| DCA-90 | R | 2/3 layers | 35—59°F/2—15°C | Air | R134A | 650W | 900 × 750 × 1250 |
| DCA-120 | R | 2/3 layers | 35—59°F/2—15°C | Air | R134A | 650W | 1200 × 750 × 1250 |
| DCA-150 | R | 2/3 layers | 35—59°F/2—15°C | Air | R404A | 800W | 1500 × 750 × 1250 |
| DCA-180 | R | 2/3 layers | 35—59°F/2—15°C | Air | R404A | 1150W | 1800 × 750 × 1250 |
| DCA-210 | R | 2/3 layers | 35—59°F/2—15°C | Air | R404A | 1350W | 2100 × 750 × 1250 |

Note:R=Refrigerator,A=Air cooling,standard for rear sliding door type.


DH—High Quality Showcase

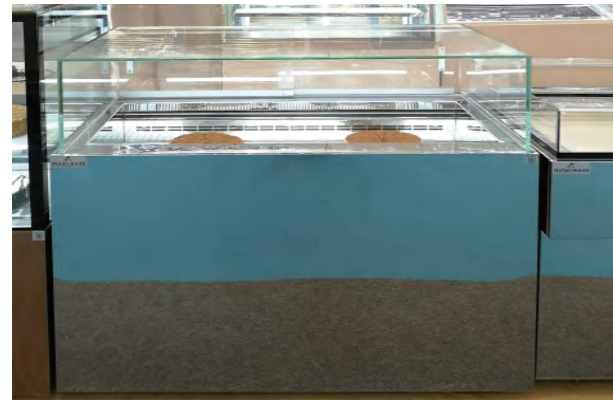

High quality showcase (1 layer)



High quality showcase (1 layer)

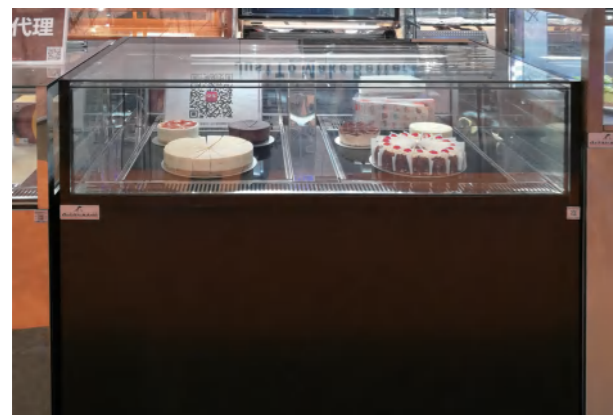

High quality showcase (2 drawers)



High quality showcase (3 drawers)

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|--------|----------|--------------|-------------------|---------|-------------|-------|----------------------|
| DH-90 | R | 1 layer | 35—59°F/2—15°C | Air | R134A | 350W | 900 × 750 × 1100 |
| DH-120 | R | 1 layer | 35—59°F/2—15°C | Air | R134A | 350W | 1200 × 750 × 1100 |
| DH-150 | R | 1 layer | 35—59°F/2—15°C | Air | R404A | 480W | 1500 × 750 × 1100 |
| DH-180 | R | 1 layer | 35—59°F/2—15°C | Air | R404A | 480W | 1800 × 750 × 1100 |

Note:R=Refrigerator,A=Air cooling.

DI—Ice Cream Showcase



Built-in ice cream showcase



Ladder ice cream showcase



Are ice cream showcase



Rectangular ice cream showcase

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|--------------------|---------|-------------|-------|----------------------|
| DI-120L | F | 10*GN1/4 | -13—0°F/-25— -18°C | Air | R404A | 850W | 1200 × 850 × 1250 |
| DI-150L | F | 12*GN1/4 | -13—0°F/-25— -18°C | Air | R404A | 1200W | 1500 × 850 × 1250 |
| DI-180L | F | 16*GN1/4 | -13—0°F/-25— -18°C | Air | R404A | 1600W | 1800 × 850 × 1250 |

Note:R=Refrigerator,A=Air cooling.

DOT—Open Showcase



DOV—High body Open Showcase



Built-in island showcase



Self-Service open showcase



Rear air curtain showcase



3 temperatures air curtain showcase



Middle open showcase



Cooked food showcase



Air curtain showcase



Combined air curtain showcase

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|-------------------|---------|-------------|-------|----------------------|
| DOT-120 | R | 1 layer | 35—59°F/2—15°C | Air | R404A | 650W | 1200 × 750 × 950 |
| DOT-150 | R | 1 layer | 35—59°F/2—15°C | Air | R404A | 800W | 1500 × 750 × 950 |
| DOT-180 | R | 1 layer | 35—59°F/2—15°C | Air | R404A | 1150W | 1800 × 750 × 950 |

Note:R=Refrigerator,A=Air cooling.

| Model | Function | Capacity (L) | Temperature °F/°C | Cooling | Refrigerant | Power | Dimensions W*D*H(mm) |
|---------|----------|--------------|-------------------|---------|-------------|-------|----------------------|
| DOV-90 | R | 4/5 layers | 35—59°F/2—15°C | Air | R404A | 850W | 900 × 750 × 1900 |
| DOV-120 | R | 4/5 layers | 35—59°F/2—15°C | Air | R404A | 1200W | 1200 × 750 × 1900 |
| DOV-150 | R | 4/5 layers | 35—59°F/2—15°C | Air | R404A | 1600W | 1500 × 750 × 1900 |
| DOV-180 | R | 4/5 layers | 35—59°F/2—15°C | Air | R404A | 2000W | 1800 × 750 × 1900 |

Note:R=Refrigerator,A=Air cooling.